

ROMAN GRANIT

2024
CATALOG

FITMOOD

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

ROMAN GRANIT



HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

2024



A perfect **look**
in a perfect **body**.

ROMAN GRANIT

ALL THE **EXCELLENCE** OF THE BEST **PORCELAIN TILES.**

A premium collection, bringing prestigious settings to life while redefining trends for modern living. There are many reasons for architects, interior designers, and final consumers to choose RomanGranit for their residential and commercial spaces: from the superior quality and reliability of the line, to the creative solutions it offers to both interior and exterior environments.



FITMOOD

New category of RomanGranit product with a unique trendy ANTIBACTERIAL technical feature. Coated with a superior layer of matte satin, finishing with embedded Ion Silver material.

SUPERIOR FEATURES FOR **UNIQUE SURFACES.**

A selection of rectified glazed porcelain tiles made only with the best raw materials. Elegant, trendy, classic, or contemporary. Our collections provide colors and sizes to create the perfect aesthetic combinations. There are many reasons to choose RomanGranit: superior quality, reliability, and creative solutions offered.



THE REAL GLAZED PORCELAIN TILES

Manufactured according to the highest standards of quality, using local white clay exposed to high pressure and temperatures exceeding 1200°C, Roman Granit is a Category B1A, certified ISO13006, product. Thanks to non-existing levels of water absorption, certified below 0,5%, real glazed porcelain tile are sure preserve their everlasting beauty.



DIGITAL TECNICA

An extraordinary technology that perfectly reproduces the actual effect of natural surfaces. Wood, marble and stone have never felt so real.



RECTIFIED EDGE

RomanGranit's products are all rectified: sizes are exact and tiles can be installed with minimum joints.

THE RELIABILITY OF A SOLID COMPANY.

Roman is the leader of ceramic brands in Indonesia. As a brand of 40 years in business, Roman offers high-value products to meet the needs of architects and interior designers: Roman ceramics tiles, suitable for everyday living spaces, and RomanGranit, a selection of refined glazed porcelain tiles.







FITMOOD

BEAUTY AGAINST BACTERIA.

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY



ICEBERG

FITMOOD




SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**




Iceberg White



GT602144AR
Iceberg White

 V1



Non random design

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

dCALCITE


FITMOOD



SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**

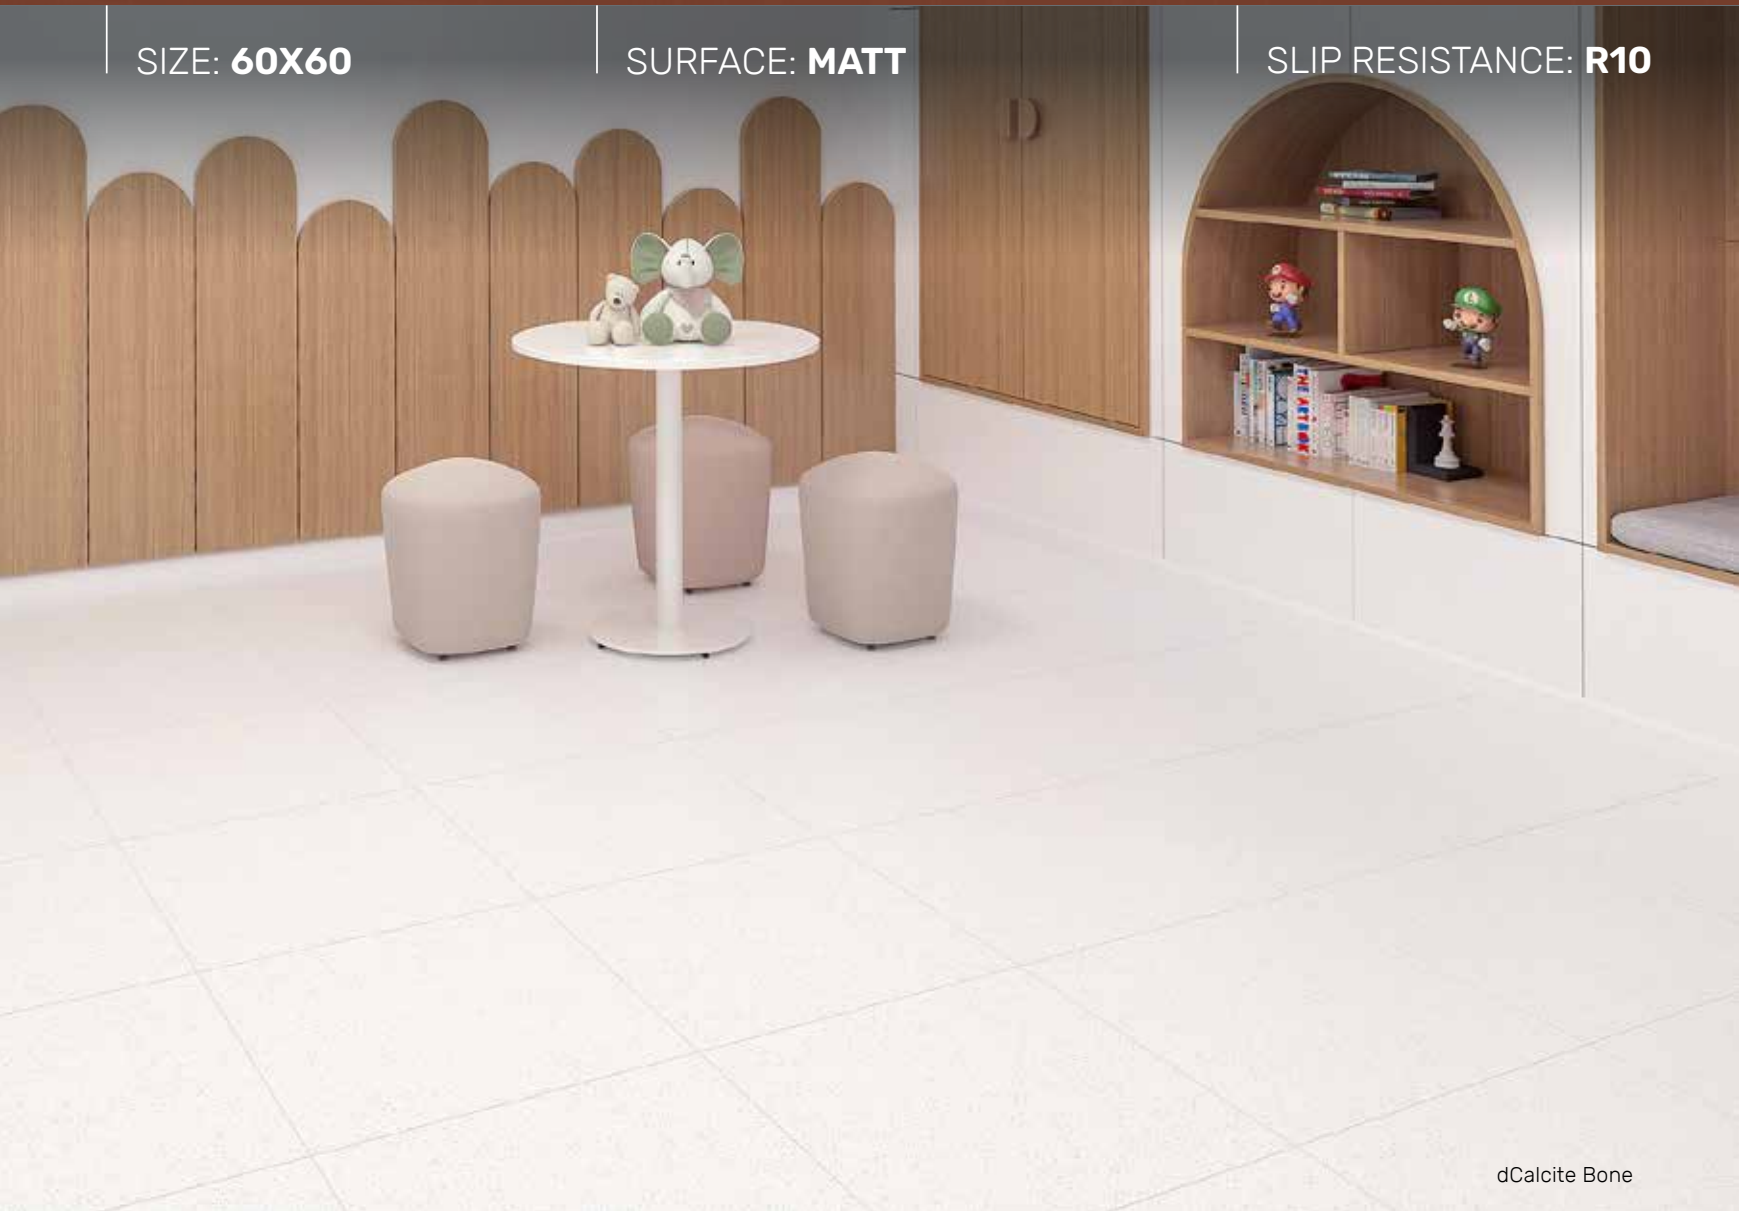

dCalcite Bone



GT603509AR
dCalcite Bone

V1



Non random design


HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**

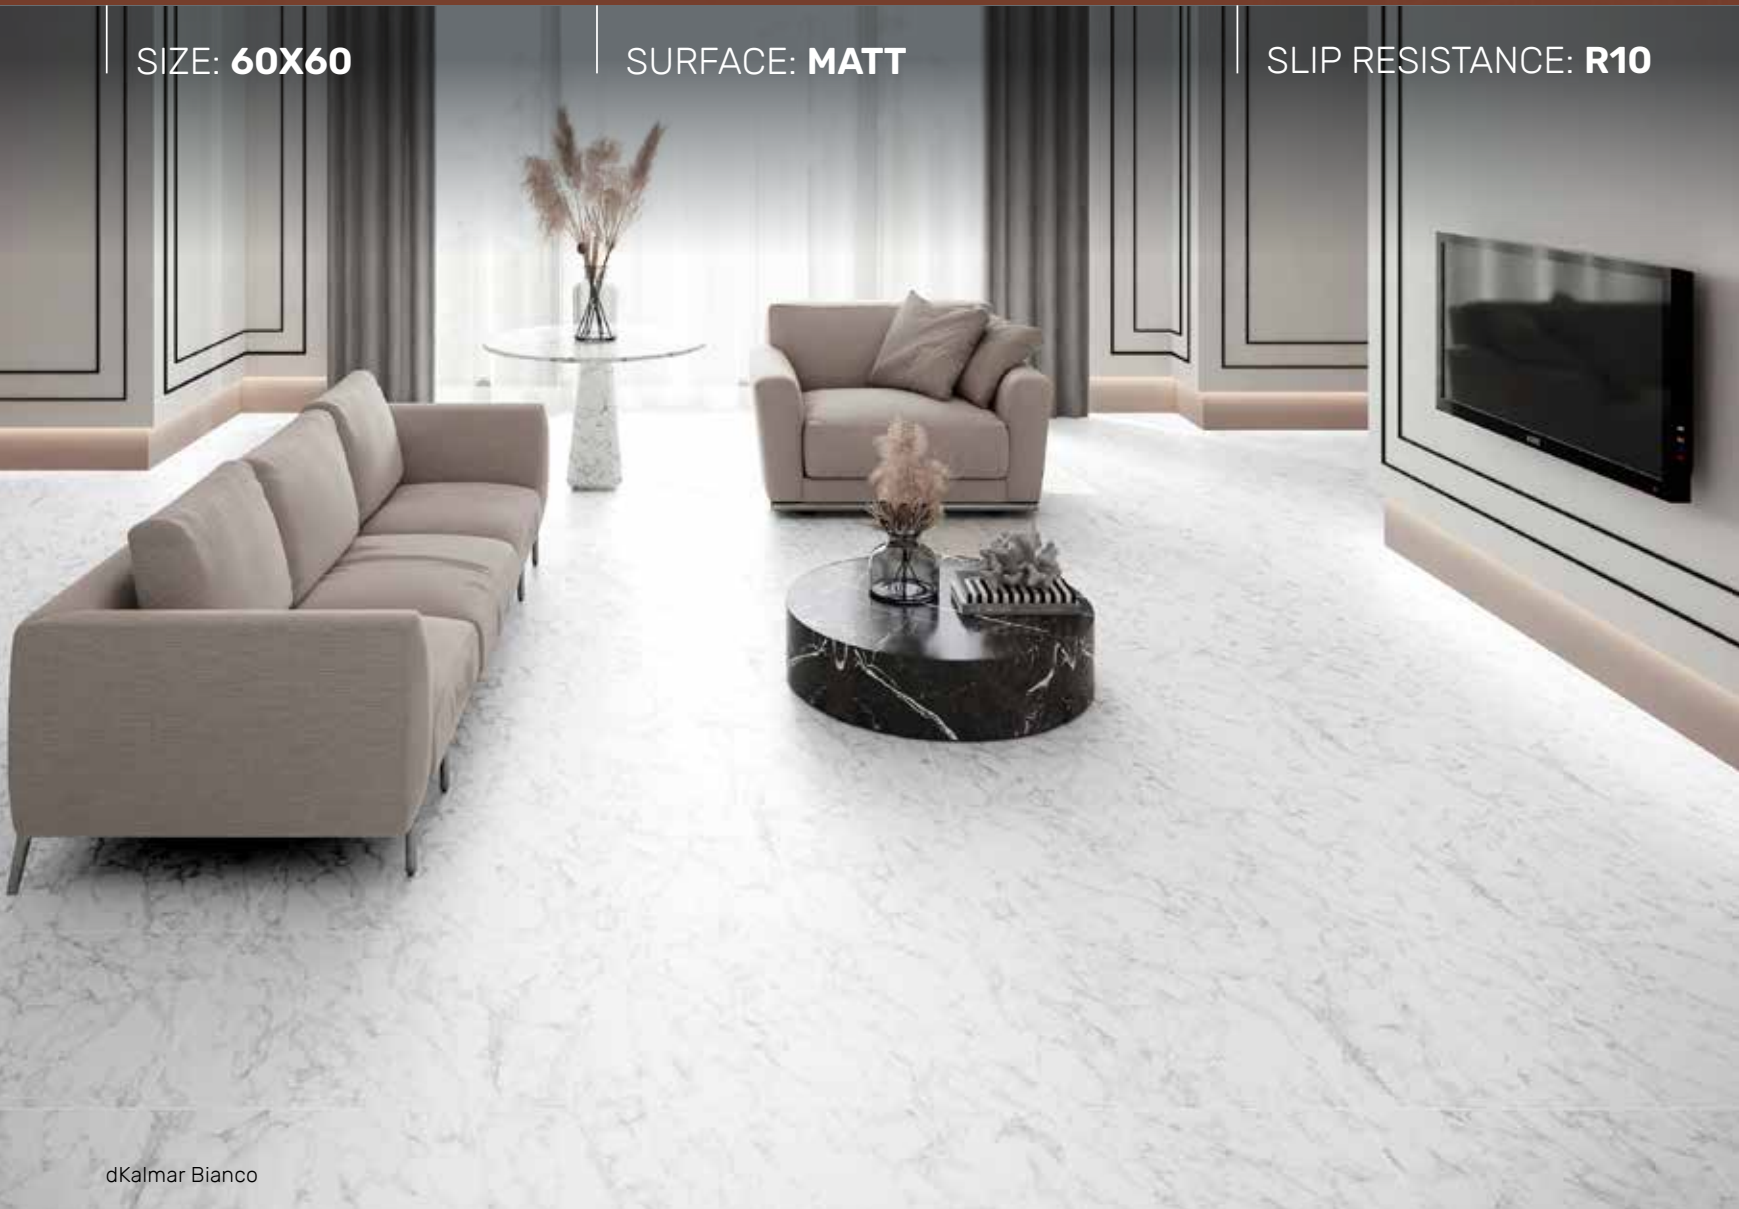

dKalmar Bianco



GT602024AR
dKalmar Bianco

V3



Moderate random design (10)

dCERVINIA


FITMOOD



SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**

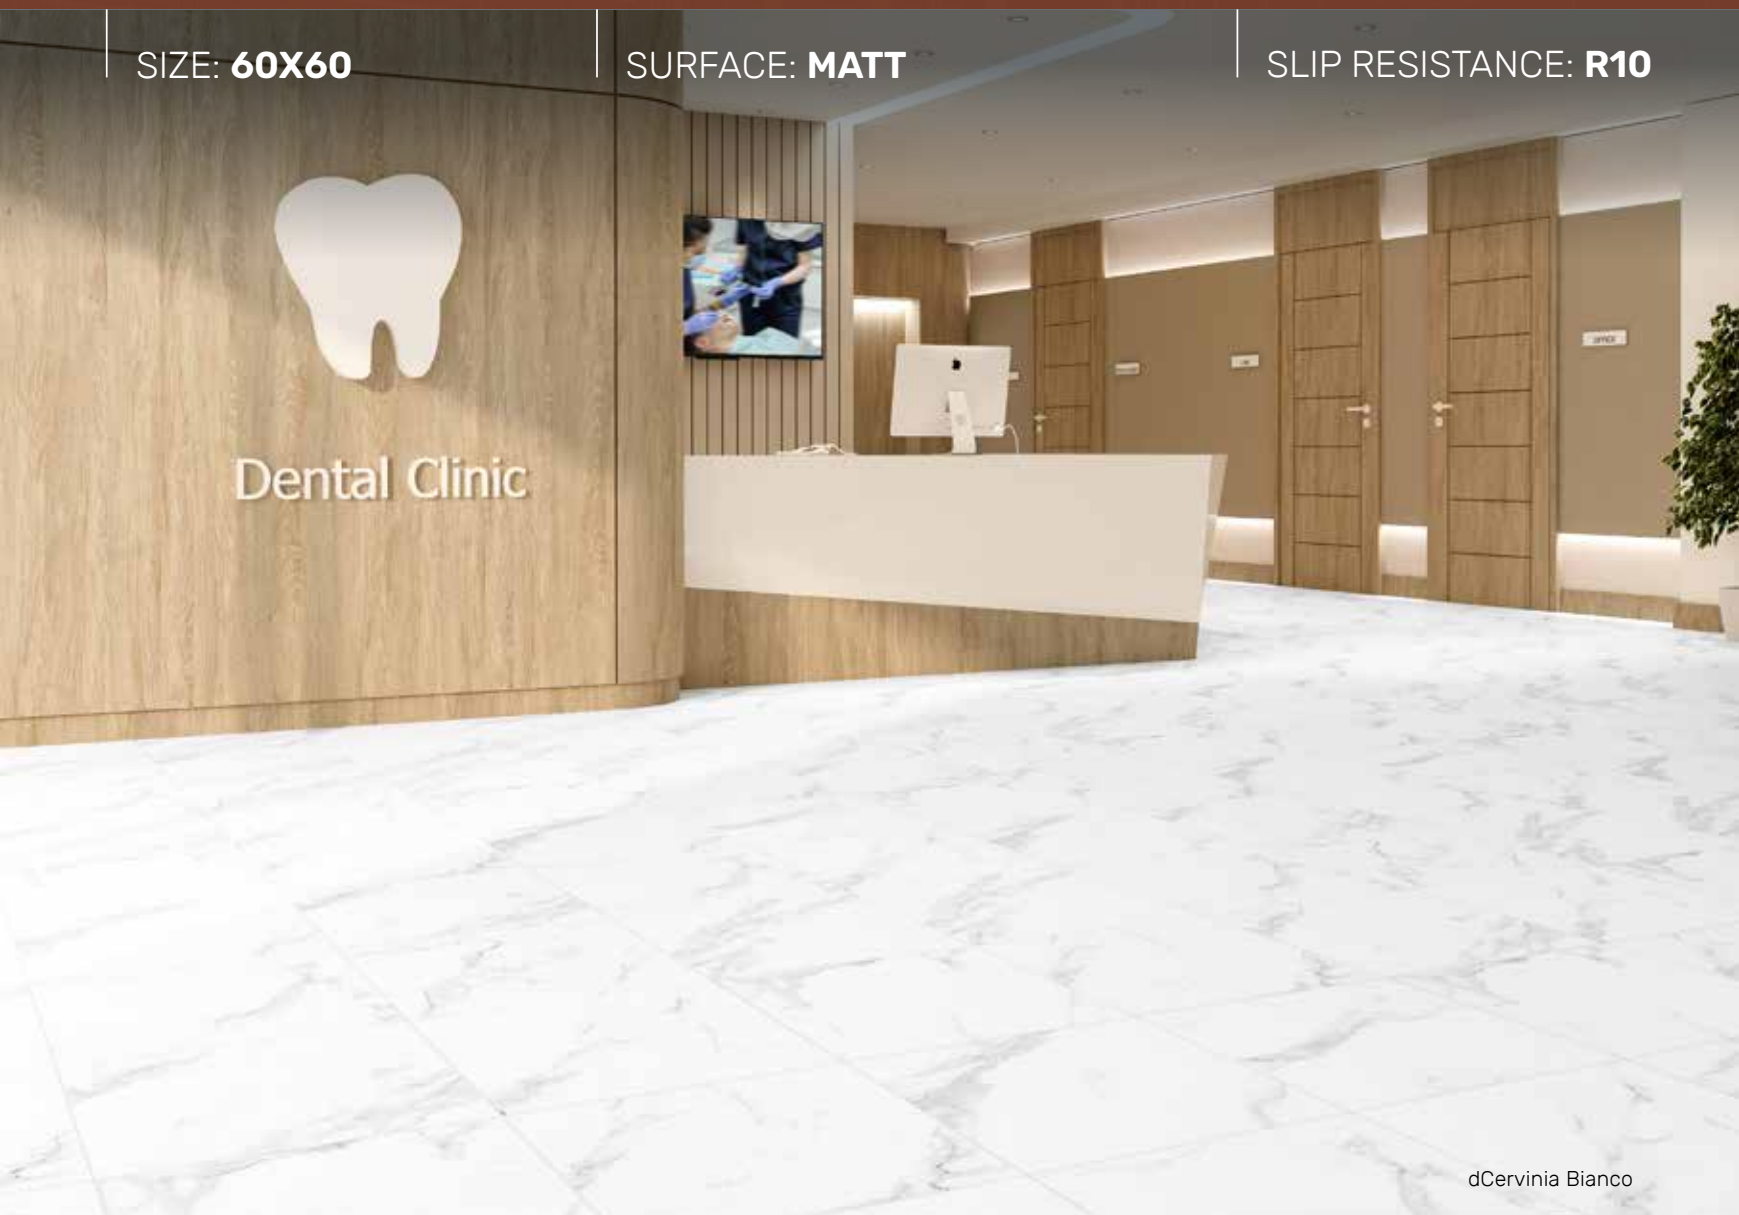

dCervinia Bianco



GT602025AR
dCervinia Bianco

V3



Moderate random design (9)

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

dLINOSA

FITMOOD



SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**

dLinosa Cream




GT603506AR
dLinosa Grey



GT603507AR
dLinosa Cream



V2

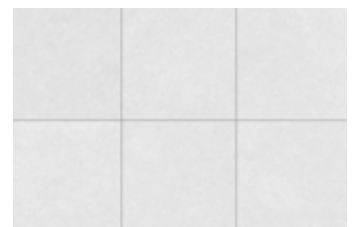

Mild random design (10)

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

SIZE: **60X60**

SURFACE: **MATT**

SLIP RESISTANCE: **R10**



dVisby Natural



GT603508AR
dVisby Natural

V2



Mild random design (9)



2024 INDEX

60x60

dCalcite	7
dCervinia	9
dKalmar	8
dLinosa	10
dVisby	11
Iceberg	6


SHADE VARIATIONS

Shade variations are the characteristic of the tile that deliberate and visible differences in graphics and colour hue. Digital Tecnica technology creates stunning porcelain tiles with hyper-realistic surface tones, markings and textures which mimic a range of natural materials including; stone, timber, terracotta, cement, mosaic, marble and more.

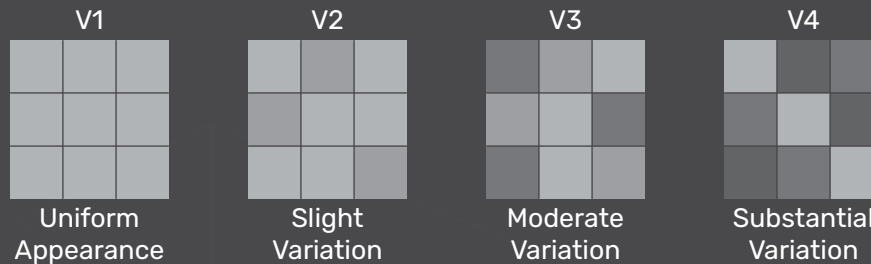

V1 (Uniform Appearance)
Differences among pieces from the same production run are minimal.

Olvera Bright
60x60



V2 (Slight Variation)
Clearly distinguishable differences in texture and/or pattern within similar colors.

dSalvadori White
60x60



V3 (Moderate Variation)
Amount and intensity of colors on each piece may vary significantly.

dRajasthan Sand
30x30



V4 (Substantial Variation)
Random color differences each tile, so that one tile may have totally different colors from other tiles.

dDutch Blue
60x60

R-RATING SLIP RESISTANT

Floor tiles these days are given an anti slip rating. This rating comes in the form of an 'R' value (Ramp test) with a scale from R9 to R13 (R9 having the least slip resistance and R13 the highest slip resistance).

CLASSIFICATION	R9	R10	R11	R12	R13
SLIP ANGLE	6-9 DEGREE	10-18 DEGREE	19-26 DEGREE	27-34 DEGREE	>35 DEGREE
WET SLIP RISK	HIGH RISK	MODERATE	MODERATE	LOW RISK	LOW RISK
AREA OF USE	DRY AREA	OCCASIONAL WETNESS	OUTDOOR ENVIROMENT	WET/OUTDOOR ENVIROMENT	VERY WET COMMERCIAL AREA

- **R9** : For internal dry area usage.
- **R10** : For internal area with occasional spill or wetness (need constant cleaning/drying) : kitchens and bathrooms.
- **R11** : For internal usage with constant spill or wetness (require continous cleaning and drying effort).
- **R12** : For external usage (works in dry and wet situation with cautions).
- **R13** : For external usage with other contaminant (such as oil).

TECHNICAL SPECIFICATION

TECHNICAL CHARACTERISTIC	TEST METHOD OR AS PER NORM	ISO 13006 REQUIREMENT	ROMANGRANIT
Length and Width	ISO 10545-2	± 0.6%	± 0.10%
Side Straightness	ISO 10545-2	± 0.5%	± 0.10%
Rectangularity	ISO 10545-2	± 0.6%	± 0.10%
Centre & Edge Curvature	ISO 10545-2	± 0.5%	- 0.15% to + 0.25%
Warpage	ISO 10545-2	± 0.5%	± 0.25%
Thickness	ISO 10545-2	± 5.0%	± 4.0%
Water Absorption	ISO 10545-3	Group B1a ≤ 0.5%	< 0.25%
Modulus of Rupture	ISO 10545-4	Group B1a 35 Ind. Min. 32 N/mm ²	≥ 40 N/mm ²
Crazing Resistance	ISO 10545-11	Required	Resistant
Chemical Resistance	ISO 10545-13	Minimum Class GB	Minimum Class GB
Stain Resistance	ISO 10545-14	Minimum Class III	Minimum Class IV
Abrasion Resistance	ISO 10545-7	Group I to V	Group III to V

- The governing sizes and weights are subject to usual variations expected of fired ceramic productions.
- Slight variations of shades/colours and surface finishes are inherent due to the nature of ceramic tile production process.

STANDARD PACKING DATA

FACTORY	TYPE	SIZE	PIECES/BOX	APPROX. SQM/BOX	APPROX. WEIGHT KG/BOX	BOXES/PALLET	PALLET/CONTAINER	APPROX. WEIGHT KG/PALLET	APPROX. WEIGHT TONNE/CONT.	APPROX. SQM/CONT.	APPROX. BOX/CONT.
SRKI	Rectified	FITMOOD 60x60	3	1.08	22.5	40	25	925	23.1	1080	1000

- Packing information may vary depending on specification of each motif and size.
- The colors illustrated in this brochure are produced near to actual colors.

HUBUNGI



JL.RAYA JANTI NO.96

YOGYAKARTA

(0274) 493 22 88

08112863773

(CHAT ONLY)

f qhomemart t qhomemart

@ qhomemart y qhomemart

WWW.QHOMEMART.COM