

DEWALT

DEWALT
SERVICE

3 YEAR
LIMITED
WARRANTY
GUARANTEED
TOUGH.




CATALOG

BARE UNIT PRODUCT
2023

58.5158° N, -6.2585° W.

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY

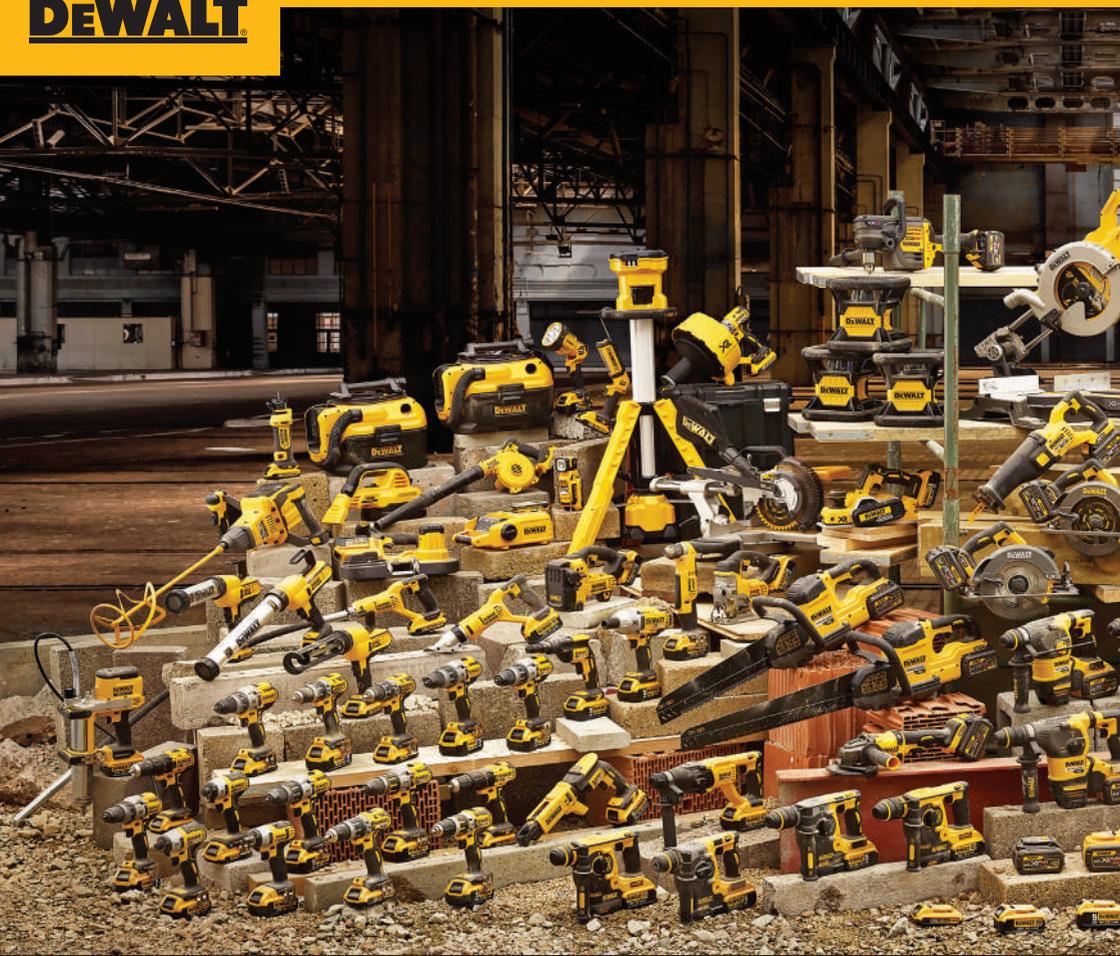

COMPLETE SOLUTIONS


DEWALT® is a market-leading manufacturer of premium power tools, accessories and anchors and fixings that provides a fully integrated system solution for various applications.

DEWALT® tools offer unparalleled performance, with durable construction for a professional finish. Rely on DEWALT® to get the job done, with a 3 year guarantee on most tools.

XR FLEXVOLT

Taking cordless drilling to the next level, the newest DEWALT® 60V MAX* XR FLEXVOLT® range provides true corded performance without the restrictions of the cord. With Brushless motors and Perform & Protect™ low vibration levels, these tools set the new standard on the jobsite.

With over 100 tools in the range the 20V MAX* XR® Lithium-Ion battery platform is the biggest and fastest growing in our range. All 20V MAX* XR® products are compatible with XR FLEXVOLT® batteries, giving you longer runtime and even greater flexibility meaning the CORDLESS JOBSITE has arrived.

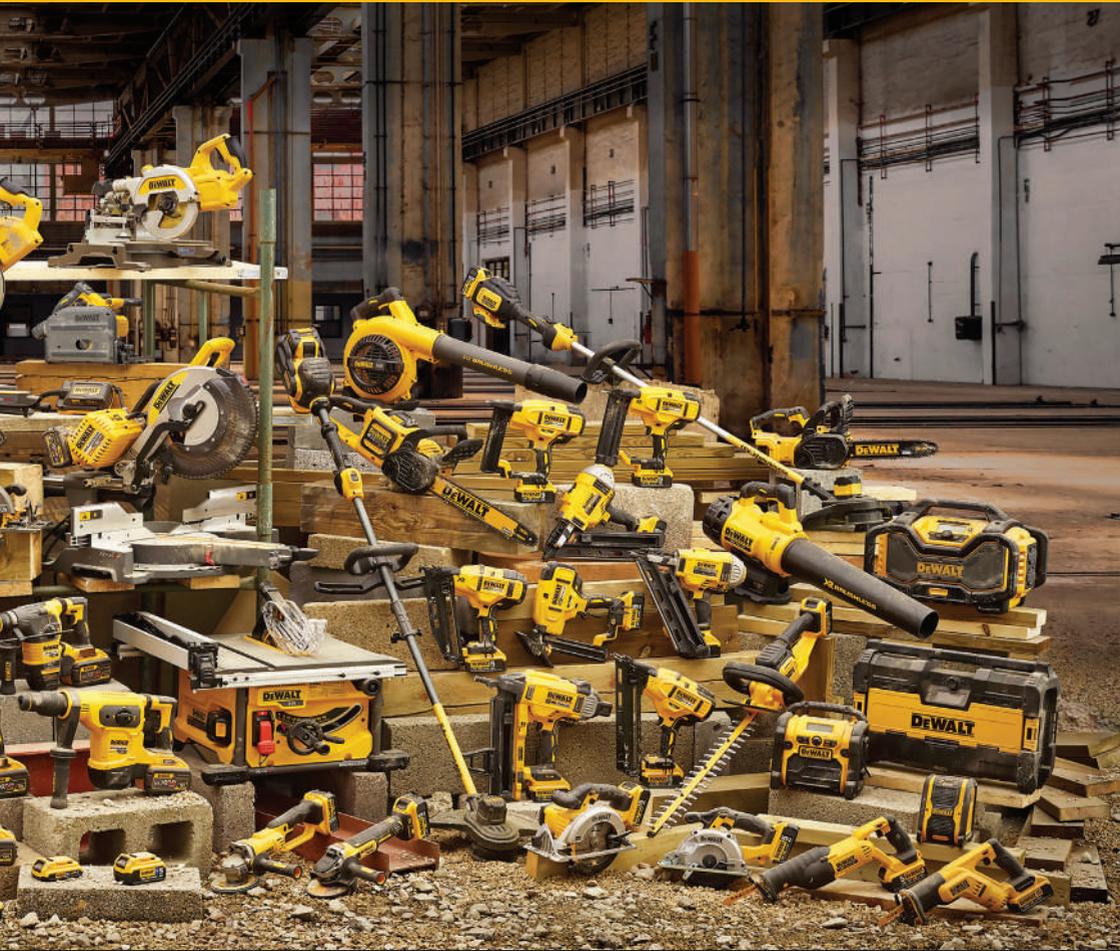

WHY CHOOSE DEWALT®?

END USER TESTING

Every one of our products are tested at length by genuine construction professionals, ensuring they never let a user down. Under the most demanding jobsite conditions, DEWALT® tools earn the right to be labelled GUARANTEED TOUGH® – in the hands of real users.

INNOVATIVE PRODUCTS

To support our users and drive our industry forward, DEWALT® consistently develop truly innovative products, across multiple categories.

This technical strength is regularly recognised by international design awards.

USER LOYALTY

DEWALT® guarantees to deliver and service high performance solution that enable the end-user to achieve productive and professional results. The cast-iron DEWALT® guarantee and premium service network ensure that our users have faith in the quality of our products. First-time buyers will become loyal DEWALT® users.

PERFORM PROTECT™

DEWALT® is constantly pushing the boundaries to create the most innovative tools for the construction professional.

Power tools which carry the Perform & Protect shield have passed rigorous testing to ensure they exceed the highest demands of the toughest environments, while maintaining a fundamental emphasis on safety. All of these products have to meet strict criteria in one or more of the following core areas: Control; Vibration; Dust.



CONTROL

Bind-up situations can occur when drilling, cutting, or grinding. These sudden torque reactions, when the tool body rotates, can potentially damage the tool or injure the user.

The Perform & Protect shield for **CONTROL** shows which products have additional features to help in those critical bind-up situations.

The two main different systems are:

- Anti rotation System for Rotary hammers
- Electronic Clutch for drills and grinders





CONTROL

Unique and innovative torque control features



VIBRATION

Up to 50% lower vibration*



DUST

Industry leading dust extraction solutions



VIBRATION

Vibration exposure can cause a range of conditions collectively known as hand-arm vibration syndrome (HAVS). Other conditions include carpal tunnel syndrome and vibration white finger.

When the Perform & Protect shield is awarded for **VIBRATION**, it is guaranteed that Tri-Axial vibration levels have been reduced, increasing usage time without reducing performance.

Three different anti-vibration systems are:

- Active Vibration Control
- Floating back handle
- Counter Balance System



DUST

Airborne dust inhalation can lead to a number of long-term health conditions such as silicosis and chronic obstructive pulmonary disease (COPD).

When the Perform & Protect shield is awarded for **DUST**, it is guaranteed the potential of inhaling dust is reduced to give a cleaner and safer working environment.

*When compared to hammers without this feature

DEWALT



XR FLEXVOLT
POWER OF CORDED | FREEDOM OF CORDLESS



WHAT IS XR FLEXVOLT?

XR FLEXVOLT® is a range of 60V MAX* power tools that offer runtime and performance which has never been seen before – for the first time, professional users can reliably undertake heavy-duty construction applications without the need for mains power.

This innovation means that for the first time, you can have 60V MAX* power across a whole range of tools without the inconvenience of a cable. DeWALT® XR FLEXVOLT® is the only battery on the market that can switch from 60V MAX* to 20V MAX*, making it backward-compatible with your existing XR® power tools.

HUBUNGI :  **QHOMEMART**

08112863773
CHAT ONLY



CONVERTIBLE BATTERY PACK



BACKWARDS COMPATIBLE

XR FLEXVOLT®



DeWALT® is committed to offering real-world practicality and convenience. The XR FLEXVOLT® battery pack is not only interchangeable across the complete 60V MAX* range but is also backwards compatible with all existing 20V MAX* XR® tools. Circular saws, Drills, Table Saws, Nail Guns, Alligator Saws, Impact Drivers – professional users can now operate every power tool they need on a single cordless system.

HOW XR FLEXVOLT® WORKS

INTELLIGENT DESIGN

XR FLEXVOLT® batteries are **20V MAX*** batteries that switch up to **60V MAX*** when placed on a **XR FLEXVOLT®** tool. They are fully compatible with the entire **20V MAX*** XR range, including chargers.



Parallel connection



Series connection



ADVANCED TECHNOLOGY

Standard XR® batteries have 5 x 3.6V (20V) cells connecting in a series and either one or two strings in parallel, giving either an 20V 2Ah or an 20V 5Ah battery.

FLEXVOLT® batteries are flexible. They connect in parallel for 20V MAX* tools and in a series for 60V MAX* tools. The result? The right power for the tool - with increased runtime and consistent performance.

60V MAX*

- WITH NO CORDS

All the tool power you need - where you need it

AUTO SWITCHING

The only battery on the market that can switch from 20V MAX* to 60V MAX*



XR® COMPATIBLE

Use with your existing XR® Powertools

HEAVY DUTY POWER

Helping to build the cordless jobsite

DEWALT SERVICE

CONVENIENCE: At the heart of the DeWALT® 5 star service promise are 5 star service agents which are conveniently located throughout the country, with specialists always available to answer any questions whether you are on or off the jobsite.

SPEED: Having your tools back in action in the fastest time possible is our prime objective. Subject to parts availability, most repairs should not take more than 48 hours in the workshop and for those smaller urgent repairs we provide a “while-u-wait” service.


QUALITY: Highest Quality is assured with DeWALT® factory trained technicians carrying out all repairs with all work being backed by our 90 day warranty. Each DeWALT® repair comes with our personal “satisfaction tag” listing all the work done and a DeWALT® contact telephone number should you be less than 100% happy with the repair.

GENUINE PARTS: All parts used in repairs are original, ensuring both the highest quality and a perfect fit every time.

ONLINE SERVICE: www.2helpU.com provides information on the DeWALT® After Sales Services, including DeWALT® authorised repair agent locations, some frequently asked questions, technical information, spare part details, warranty policy and recycling of used tools.

Not all DeWALT® service agents are 5 star rated. Those that are not may not be able to provide all services available above but will display in-store a detailed list of their selected services.



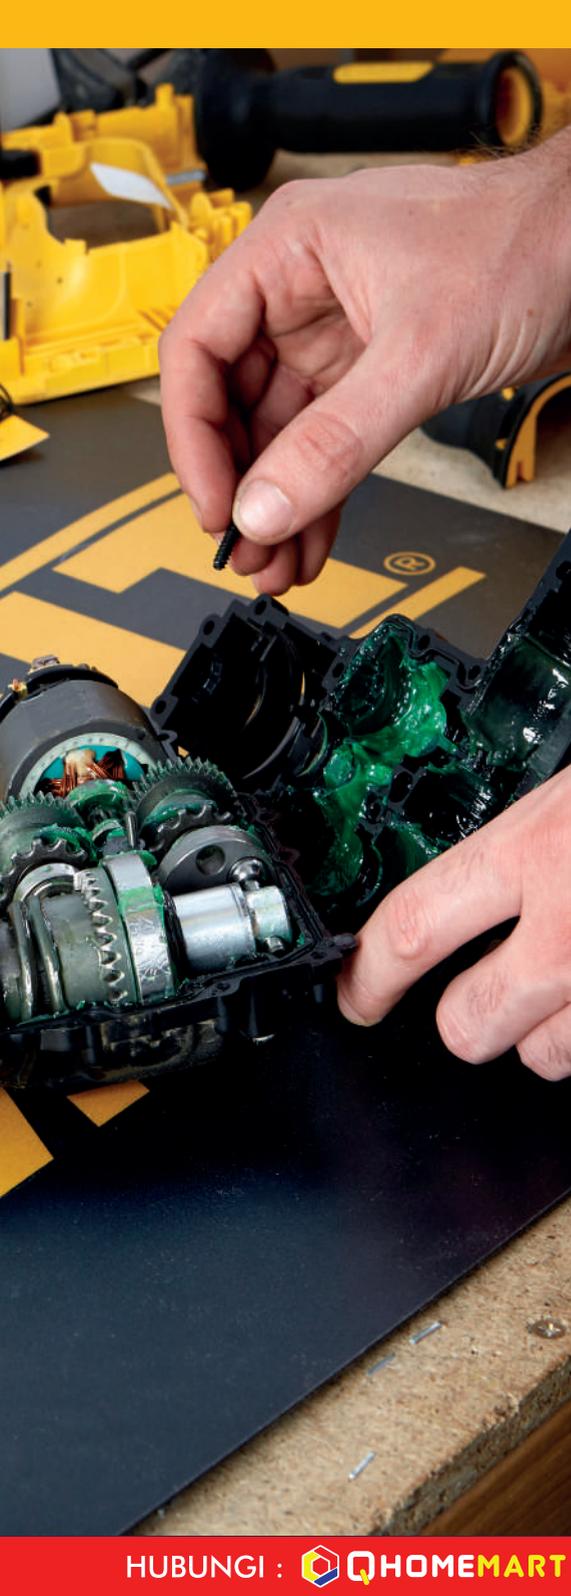

DEWALT 3YR WARRANTY

We believe a solid warranty package ensures the safety, reliability and service our products are meant to deliver - from the beginning to the end of every job.

The DeWALT® 3 year warranty covers manufacturing defects and labour for all products.


WARRANTY TERMS AND CONDITIONS

DeWALT® will repair, without charge, any defects due to defective materials or workmanship, within 3 years from date of purchase.

- The Warranty does not cover part failure due to excessive wear and tear or tool misuse

Wear & Tear refers to the number of hours and/or the environment that a product has been used in; this can affect: Armature Commutators, Bearings, Switches, Beat Pieces, Clutches, Gear & Pinion, Gearcase, Brushes, Chucks, Clamshells, Cord sets, Rubber parts and Attachments (Battery, Charger, Guard, Flanges ... etc.)

- The warranty does not apply where repairs have been attempted by unauthorised persons
- Issues not covered by the warranty include:
 - Extreme impacts or drops
 - Ingestion of foreign objects (i.e. Nails, screws ... etc)
 - Using tool for non-intended application
 - Any modification to the tool
 - Prolonged exposure to the extreme weather conditions
 - Wrong voltage
 - Using incorrect accessories or attachments
 - Lack of recommended service (especially hammers)
 - Use of incorrect grease
 - Not repaired with DeWALT® genuine parts

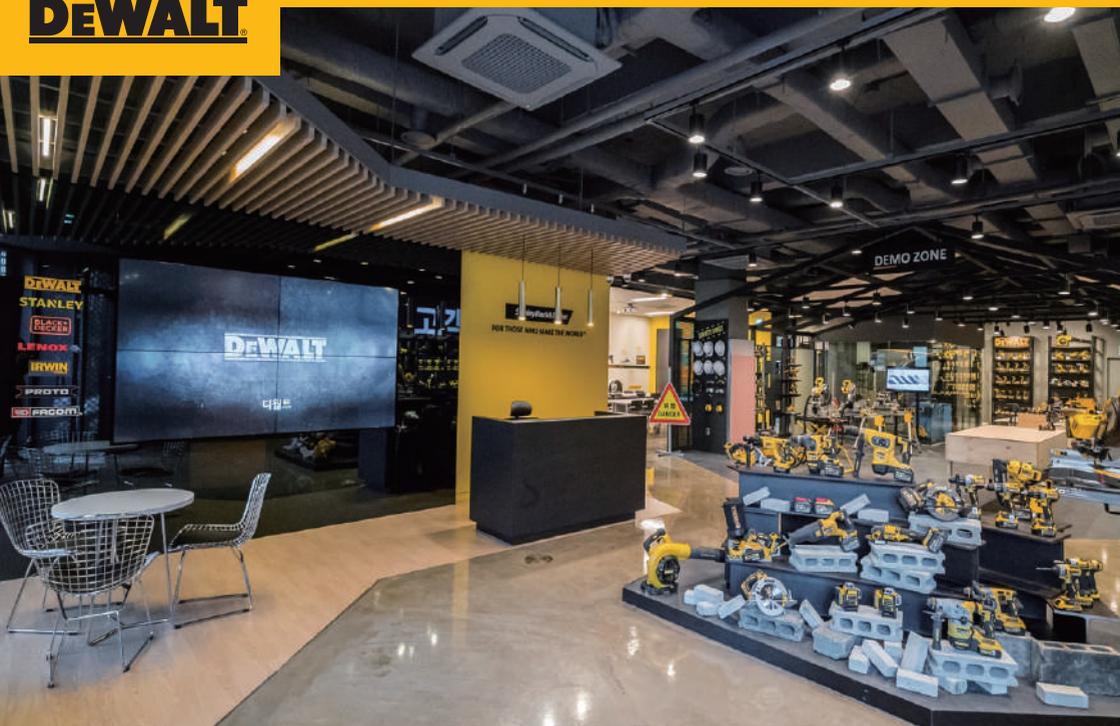

CUSTOMER EXPERIENCE CENTRE

Stanley Black & Decker currently operates state of art customer experience centers in four locations across Asia in Seoul - South Korea, Bangkok - Thailand, Pune - India & Shuzho - China. These centers not only enables us to showcase leading innovations in the world of powers tools, hand tools & power tool accessories it also provided a great platform for our customers to get an hands-on experience on using these products and make the right selection for some of their most demanding applications.

In addition these centers are used for safety & application trainings for industrial applications, new employee induction & advance employee modules, customer & channel partner team training, top to top

interactions and last but not the least Corporate Social Responsibility initiatives centered around makers of tomorrow – tradesmen, contractors and students in true spirit of our corporate mission. For the builders and protectors, for the makers and explorers, for those shaping and reshaping our world through hard work and inspiration, Stanley Black & Decker provides the tools and innovative solutions you can trust to get the job done—and we have since 1843.





**SALES AND
AFTER SALES
SUPPORT**



**ORIGINAL
PARTS**



WARRANTY



**GREAT SERVICE
NETWORK**



INFORMATION



**OMNICHANNEL
SUPPORT**

TOTAL CARE

**WE ARE COMMITTED TO EXCELLENCE IN OUR
TOOLS AND OUR SUPPORT**

Total Care establishes more direct and effective engagement with customers and channel partners Our goal is to give you an added value experience, and to increase your customers' satisfaction with Stanley Black & Decker by providing more engaged support.

DEWALT

POWERSTACK™

300+

MADE IN
20V™ PRODUCTS
AND GROWING™

DCD991NT
BL drill Driver 95Nm

DCF921N
Impact Wrench

DCE530N
20V Heat gun

DCS331N
Jigsaw bare

DCW210N
Sander

DCD7781-KR
BL Hammer drill

DCD999N
20FVA
Hammer Drill

DCG418N
Grinder Flexvolt

DCS382N
Recip Saw

DCF897N
¾" impact
Wrench

DCF900N
HT Impact
Driver

DCM848N
Polisher

DCF850N
Impact Driver

DCD7771-KR
BL drill Driver


DCG406N
Grinder 5"



DCBP520
20V MAX DeWALT POWERSTACK™
(5 AH) BATTERY

CONTENTS

POWERSTACK.....	3
HAMMER DRILL & DRILL DRIVER	7
IMPACT DRIVER.....	8
IMPACT WRENCH	8
GRINDER.....	9
JIGSAW.....	10
SANDER	10
RECIPROCATING SAW	11
POLISHER	11
HEAT GUN	11
AUTHORIZED SERVICE CENTER.....	15

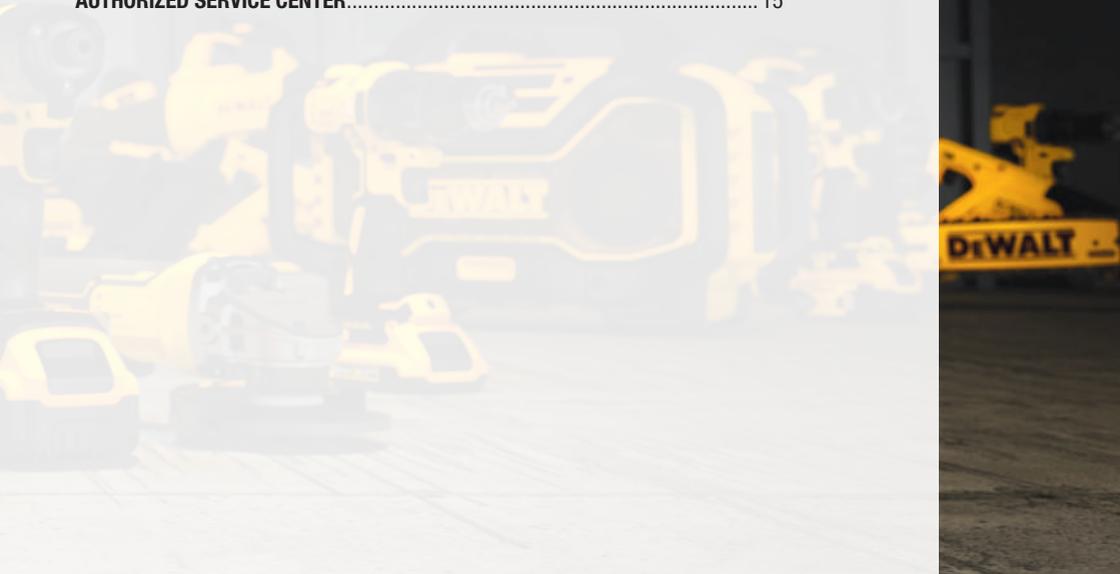

DEWALT

POWERSTACK™

5AH



THE NEXT DIMENSION IN POWER™

DCBP520 20V MAX* DEWALT POWERSTACK™ (5 AH) BATTERY

PRODUCTIVITY LIKE YOU'VE NEVER SEEN BEFORE

The DEWALT POWERSTACK™ 5.0 Ah 20V MAX* battery utilizes pouch cell technology making our most powerful battery in its class**

300+
20V MAX* PRODUCTS
AND GROWING™

*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.

**Vs. DEWALT XR batteries 5Ah or less, not in application.

HUBUNGI :  QHOMEMART

08112863773
CHAT ONLY

20V MAX* DEWALT POWERSTACK™ 5.0 AH BATTERY KIT

DCBP520-B1

- OVER-MOLDED RUBBER BASE also helps to protect finished surfaces
- COMPATIBLE With all DEWALT 20V MAX* tools & chargers
- FUEL GAUGE LED state-of-charge indicator



POWERSTACK™

FUEL GAUGE
LED state-of-charge indicator

2X LIFESPAN**
Double cycle life



OVERMOLDED BASE
Provides additional impact resistance for drops

300+ COMPATIBILITY
20V PRODUCTS AND GROWING
With all DEWALT 20V MAX* tools & chargers



* Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.
**Vs. DEWALT XR batteries 5Ah or less, not in application.



DEWALT®

POWERSTACK™



THE NEXT DIMENSION IN POWER™

DCBP034 20V MAX* DEWALT POWERSTACK™ COMPACT BATTERY

PRODUCTIVITY LIKE YOU'VE NEVER SEEN BEFORE

DEWALT POWERSTACK™ Compact 20V MAX* Batteries utilize stacked pouch cell technology making them our lightest** and most powerful** batteries yet.

300+
20V MAX* PRODUCTS
AND GROWING

HUBUNGI :  QHOMEMART

08112863773
CHAT ONLY


20V MAX* DEWALT POWERSTACK™ 1.7AH COMPACT BATTERY

DCBP034-B1


- 50% more power in a 25% more compact battery
- DESIGNED TO RESIST WEAR-AND-TEAR: Durable, overmolded base provides impact resistance
- LONG-LASTING: Battery provides 2X lifetime



POWERSTACK™

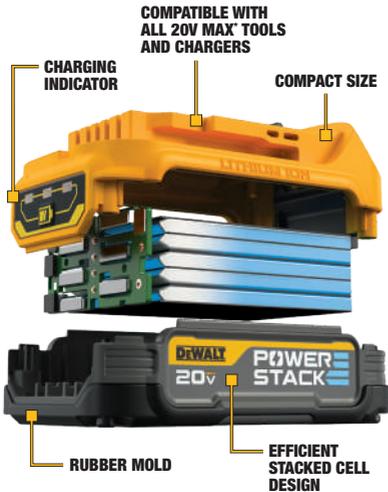

COMPATIBLE WITH ALL 20V MAX* TOOLS AND CHARGERS

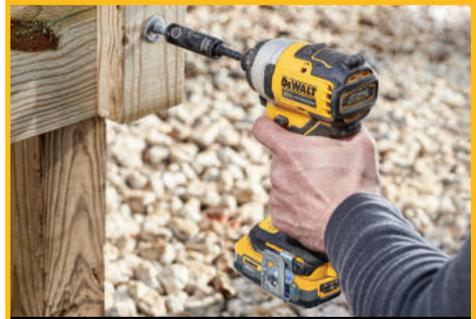

Compatible with DCF809 20V MAX* impact driver



Compatible with DCH172 20V MAX* SDS plus rotary hammer

*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.
 ** Regarding 50% more power: vs. DCB183, not in application. Regarding 25% more compact: footprint vs. DCB183 battery. Regarding 15% less weight: vs. DEWALT 20V MAX* batteries 2Ah or lower.
 *** Regarding 2x lifetime: charge cycles vs. DCB183 battery.



20V MAX* LITHIUM ION BRUSHLESS PREMIUM DRILL DRIVER - BARE UNIT
DCD991NT-XJ

Voltage (V)	20
Battery Chemistry	Lithium Ion
Max. Torque [Hard](Nm)	95
Max. Torque [Soft](Nm)	66
No Load Speed (Rpm)	0-450/1300/2000
Chuck Capacity (mm)	1.5-13
Max. Drilling Capacity [Wood/Metal]	55/15
Weight (Kg)	2.1
Length x Height (mm)	200 X 208


20V MAX* BRUSHLESS 1/2" HAMMER DRILL/DRIVER WITH FLEXVOLT ADVANTAGE™- BARE UNIT
DCD999N-B1

Voltage (V)	20
Battery Chemistry	XR Li-Ion
Max. Torque (Nm)	126
No Load Speed (Rpm)	0-450 / 0-1,300 / 0-2,000
Impact Rate (Bpm)	0-8,500 / 0-25,500 / 0-38,250
Clutch Settings	11
Chuck Size (inch)	1/2
Unit Watts Out	1,219 Uwo
Tool Length (inch)	8.4
Weight [Tool Only] (Kg)	1.61


20V MAX* LITHIUM ION BRUSHLESS DRILL DRIVER - BARE UNIT
DCD7771N-KR

Voltage (V)	20
Battery Chemistry	Lithium Ion
Max. Torque [Hard] (Nm)	65
Max. Torque [Soft] (Nm)	26
No Load Speed (Rpm)	0-500/1,750
Chuck Capacity (mm)	1.5-13
Max. Drilling Capacity [Wood/Metal]	30/13
Weight [Tool Only] (Kg)	1.15
Length x Height (mm)	192 x 198



20V MAX* COMPACT BRUSHLESS 1/2" (13 MM) HAMMER DRILL DRIVER - BARE UNIT

DCD7781N-KR

Voltage (V)	20
Battery Chemistry	Lithium Ion
Max. Torque [Hard] (Nm)	65
Max. Torque [Soft] (Nm)	26
No Load Speed (RPM)	0-500/1,750
Beats Per Minute (BPM)	0-8,500/29,750
Chuck Capacity (mm)	1.5-13
Max. Drilling Capacity [Wood/Metal/Masonry] (mm)	30/13/13
Weight (Kg)	1.82
Length x Height (mm)	204 x 198



HAMMER DRILL & DRILL DRIVER

ATOMIC™ 20V MAX* 1/4" BRUSHLESS CORDLESS 3-SPEED IMPACT DRIVER - BARE UNIT

DCF850N-KR

Voltage (V)	20
Bit Holder Size (inch)	1/4
No Load Speed (RPM)	0-3,250
Max. Torque (Nm)	205
Impact Rate (IPM)	0-3,800
Battery Chemistry	XR Li-Ion
Weight (Kg)	0.95



IMPACT DRIVER

20V MAX* 1/2" IMPACT WRENCH - BARE UNIT

DCF921N

Voltage (V)	20
Tool Length	125
Anvil Size	12.7
No Load Speed (RPM)	0-2,500
Impact Rate (IPM)	0-3,600
Max Tightening Torque (Nm)	406
Max Breakaway Torque (Nm)	610
Weight [Tool Only] (Kg)	1.1



IMPACT WRENCH

20V MAX* LITHIUM ION BRUSHLESS 3/4" IMPACT WRENCH - BARE UNIT
DCF897N-XJ

Voltage (V)	20
Battery Chemistry	Lithium Ion
Anvil Size (inch)	3/4
Anvil Style	Hog Ring
Max. Torque (Nm)	136/407/950
Breakaway Torque (Nm)	1627
No Load Speed (Rpm)	0-400/1200/1900
Impacts Per Minute (Ipm)	0 - 2400
Max. Bolt Diameter	M24
Tool Holder (mm)	19
Weight (Kg)	3.26
Length x Height (mm)	224 x 278


20V MAX* BRUSHLESS 1/2" HIGH TORQUE IMPACT WRENCH - BARE UNIT
DCF900N-B1

Voltage (V)	20
Tool length (mm)	224
Anvil Size (inch)	1/2
Anvil Style	Hog Ring
Fastening Torque (Nm)	1396
Breakaway Torque (Nm)	1898
Revolutions Per Minute (RPM)	0-2300
Impact Rate (IPM)	0-2200
Battery Chemistry	XR Li-Ion
Weight (Tool Only) (Kg)	2.8


FLEXVOLT® 60V MAX* 5" ANGLE GRINDER - BARE UNIT
DCG418N-KR

Voltage (V)	60V max
Battery Chemistry	Lithium Ion
Disc Diameter (mm)	125
Spindle Thread	M10
Switch Type	Trigger switch
No Load Speed (Rpm)	9,000
No Volt Switch	Yes
OverLoad Protection	Yes
Weight (Kg)	3.2
Length x Height (mm)	400 x 125


ONLY COMPATIBLE WITH FLEXVOLT BATTERY

20V LITHIUM ION BRUSHLESS ANGLE GRINDER - BARE UNIT

DCG406N-KR

Voltage (V)	20
Battery Chemistry	Lithium Ion
Disc Diameter (mm)	100
Spindle Thread	M10
Switch Type	Paddle
No Load Speed (Rpm)	9,000
Weight (Kg)	1.74
Length x Height (mm)	310 x 125



GRINDER

18V MAX* LITHIUM ION TOP HANDLE JIGSAW - BARE UNIT

DCS331N-KR

Voltage (V)	18
Battery Chemistry	Lithium Ion
No Load Stroke Rate	0-3000
Stroke Length	26
Bevel Capacity	45°
Jigsaw Blade Type	T-Shank
Tool Holder	Quick Release
Weight (Kg)	3.1
Length x Height (mm)	305 x 215



JIGSAW

20V MAX* LITHIUM ION BRUSHLESS 125MM RANDOM ORBITAL SANDER - BARE UNIT

DCW210N-KR

Voltage (V)	20
Battery Chemistry	Lithium Ion
Variable Speed	Yes
Orbits Per Minute (Opm)	8,000 - 12,000
Orbit Size (mm)	2.6
Paper Size (mm)	125
Weight (Kg)	1.7
Length x Height (mm)	170 x 127



SANDER

20V MAX* XR® BRUSHLESS CORDLESS RECIPROCATING SAW - BARE UNIT

DCS382N-XJ

Voltage (V)	20
Stroke / Min (spm)	0-3200
Stroke Length (mm)	28.6
Max. Cutting Capacity In [Wood/ Metal/ Plastic] (mm)	300/130/160
Tool Holder	Quick Release
Length x Height (mm)	130x310
Tool Weight [Tool only] (Kg)	2.3



20V LITHIUM ION BRUSHLESS POLISHER - BARE UNIT

DCM848N-XJ

Voltage (V)	20
Battery Chemistry	Lithium Ion
No Load Speed (Opm)	2000-5500
Recommended backing pad diameter (mm)	125
Max. backing pad diameter (mm)	125
Tool Weight [Tool only] (Kg)	2.9



20V MAX* LITHIUM ION HEAT GUN - BARE UNIT

DCE530N

Voltage (V)	20
Temperature Settings	High 990/ Low 550 MAX
Lock-on Button	Yes
CFM	7
Length (mm)	161
Height (mm)	194.8
Tool Weight [Tool only] (Kg)	0.53



DEWALT[®]
GUARANTEED TOUGH.[®]

HUBUNGI



JL. RAYA JANTI NO.96

YOGYAKARTA

(0274) 493 22 88

08112863773

(CHAT ONLY)

 [qhomemart](#)  [qhomemart](#)

 [qhomemart](#)  [qhomemart](#)

WWW.QHOMEMART.COM