



LIGHTING COLLECTION CATALOG



“ It’s a new world
of lighting. People have
to think about it more
than ever ”

Joseph Rey-Barreau
lighting designer and architect



LED BULB

LUXMENN offers a wide array of LED BULB LAMPS for perfect retrofit application to traditional light source whilst rendering more energy saving and creating friendly global environment.

Product Features

- Average lifetime : 20,000 hrs
- Built using high quality LED chip
- Thermo Plastic housing with Alumunium inside for better heat dissipation
- Higher Lumen efficiency of $>80\text{lm/W}$ and $\text{CRI} >80$
- No flickering, No UV and No IR

Application

- All typical household luminariaea
- Hotel
- Office
- Cafe / Restaurant
- Facility
- Hospital

LED BULB



BULB SERIES



VOLTAGE
AC 100-240 V



CCT (TEMP)
3000 & 6000 K



BASE
E27



PF
≥ 0.5



MATERIAL
PLASTIC



BEAM ANGLE
220°



CRI
≥ 80



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-B50H	LUX-B65H	LUX-B70BH
WATTAGE (W)	3 W	7 W	10 W
LUMINOUS (LM)	200-270 LM	500-600 LM	700-900 LM
DIMENSION (MM)	Φ 50x80 MM	Φ 60x110 MM	Φ 70x122 MM

PRODUCT CODE	LUX-B70AH	LUX-B75AH
WATTAGE (W)	12 W	18 W
LUMINOUS (LM)	800-1.000 LM	1.600 LM
DIMENSION (MM)	Φ 70x122 MM	Φ 70x148 MM

PRODUCT CODE	LUX-B80H	LUX-B90H
WATTAGE (W)	25 W	40 W
LUMINOUS (LM)	1.750-2.100 LM	2.700-3.000 LM
DIMENSION (MM)	Φ 100x165 MM	Φ 65x135 MM

UFO BULB



VOLTAGE
AC 100-240 V



CCT (TEMP)
3000 & 6000 K



BASE
E27



PF
≥ 0.5



MATERIAL
PLASTIC



BEAM ANGLE
220°



CRI
≥ 80



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-UF12	LUX-UF15
WATTAGE (W)	12 W	15 W
LUMINOUS (LM)	700-900 LM	1.200-1.400 LM
DIMENSION (MM)	Φ 95x80 MM	Φ 120x90 MM



Tersedia di :



LED BULB



CANDLE BULB



VOLTAGE
AC 220-240 V



CCT (TEMP)
3000 & 6000 K



BASE
E14



PF
≥ 0.5



MATERIAL
PLASTIC



BEAM ANGLE
220°/260°



CRI
≥ 80



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-CBG	LUX-CBS	LUX-CBW
WATTAGE (W)	5 W	5 W	5 W
LUMINOUS (LM)	300 LM	300 LM	300 LM
DIMENSION (MM)	Φ 35x100 MM	Φ 35x135 MM	Φ 35x135 MM

FILAMENT CANDLE BULB



PRODUCT CODE
LUX-C35



WATTAGE (W)
25 W



LUMINOUS (LM)
300 LM



BASE
E14



DIMENSION (MM)
Φ 35x100 MM



VOLTAGE
AC 220-240 V



CCT (TEMP)
2700 K



PF
≥ 0.5



MATERIAL
PLASTIC



BEAM ANGLE
220°/260°



LIFETIME (H)
≥ 20.000



CRI
≥ 80



FILAMENT BULB



VOLTAGE
AC 180-240 V



CCT (TEMP)
2700 K



BASE
E27



PF
≥ 0.5



MATERIAL
PLASTIC



BEAM ANGLE
220°/260°



CRI
≥ 80



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-ST64	LUX-G80
WATTAGE (W)	4 W	4 W
LUMINOUS (LM)	320 LM	320 LM
DIMENSION (MM)	Φ 60x110 MM	Φ 80x110 MM

Tersedia di :





LED DOWNLIGHT

LUXMENN provides you premium quality indoor and outdoor LED DOWNLIGHT with style and high performance. Constructed to present high lumen and wide beam angle that is able to fill rooms with high ceilings up to four meters. Designed for easy and quick installation with less expense.


Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>80\text{lm/W}$ and $\text{CRI} >80$
- Built with high quality & certified LED Chip
- Easy installation with slim design
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Residential / Home
- Hotel and Meeting Room
- Office
- School, College and University
- Factory
- Hospital

LED DOWNLIGHT INBOW

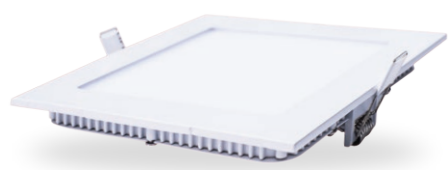

PANEL DOWNLIGHT

SLIM DESIGN FOR LOW CEILING



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



MATERIAL
PLASTIC



CRI
≥ 80



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-M203	LUX-M204	LUX-M206
WATTAGE (W)	9 W	12 W	18 W
LUMINOUS (LM)	810 LM	1.100 LM	1.600 LM
DIMENSION (MM)	145x145x18 MM	168x168x18 MM	225x225x18 MM
CUT OUT (MM)	135 MM	155 MM	200 MM

PANEL DOWNLIGHT

SLIM DESIGN FOR LOW CEILING



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



MATERIAL
PLASTIC



CRI
≥ 80



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-M103	LUX-M104	LUX-M106
WATTAGE (W)	9 W	12 W	18 W
LUMINOUS (LM)	810 LM	1.100 LM	1.600 LM
DIMENSION (MM)	Φ 145x18 MM	Φ 168x18 MM	Φ 225x18 MM
CUT OUT (MM)	135 MM	155 MM	200 MM

* Ukuran produk ini bukan sebagai acuan untuk melubangi plafon

Tersedia di :



LED DOWNLIGHT INBOW



PCB DOWNLIGHT EXTRA BRIGHT



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



MATERIAL
PLASTIC



CRI
≥ 80



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-H200	LUX-H300	LUX-H500 (TRICOLOR)
WATTAGE (W)	3 W	5 W	10 W
LUMINOUS (LM)	200-300 LM	350-500 LM	700-900 LM
DIMENSION (MM)	Φ 96x44 MM	Φ 108x44 MM	Φ 145x44 MM
CUT OUT (MM)	80 MM	95 MM	125 MM

PRODUCT CODE	LUX-H800	LUX-H850
WATTAGE (W)	15 W	18 W
LUMINOUS (LM)	1.000-1.300 LM	1.200-1.600 LM
DIMENSION (MM)	Φ 160x44 MM	Φ 185x44 MM
CUT OUT (MM)	145 MM	170 MM

* Ukuran produk ini bukan sebagai acuan untuk melubangi plafon



LED DOWNLIGHT OUTBOW



PCB DOWNLIGHT SQUARE, UNFRAMED

 PRODUCT CODE
LUX-PM208

 VOLTAGE
AC 85-265 V

 CCT (TEMP)
3000 & 6000 K

 PF
≥0.5

 MATERIAL
PLASTIC

 BEAM ANGLE
110°

 LIFETIME (H)
≥ 20.000

 CRI
≥ 80

WATTAGE (W)	12 W	18 W
LUMINOUS (LM)	850-1.100 LM	1.200-1.600 LM
DIMENSION (MM)	120x120x56 MM	180x180x56 MM

PCB DOWNLIGHT ROUND, UNFRAMED



 PRODUCT CODE
LUX-PM209

 VOLTAGE
AC 85-265 V

 CCT (TEMP)
3000 & 6000 K

 PF
≥0.5

 MATERIAL
PLASTIC

 BEAM ANGLE
110°

 LIFETIME (H)
≥ 20.000

 CRI
≥ 80

WATTAGE (W)	12 W	18 W
LUMINOUS (LM)	850-1.100 LM	1.200-1.600 LM
DIMENSION (MM)	Φ 120x56 MM	Φ 180x56 MM



PCB DOWNLIGHT SQUARE, FRAMED

 PRODUCT CODE
LUX-PM210

 VOLTAGE
AC 85-265 V

 CCT (TEMP)
3000 & 6000 K

 PF
≥0.5

 MATERIAL
PLASTIC

 BEAM ANGLE
110°

 LIFETIME (H)
≥ 20.000

 CRI
≥ 80

WATTAGE (W)	12 W	18 W
LUMINOUS (LM)	800-1.000 LM	1.100-1.500 LM
DIMENSION (MM)	175x175x45 MM	225x225x45 MM

LED DOWNLIGHT OUTBOW

PCB DOWNLIGHT ROUND, FRAMED



PRODUCT CODE
LUX-PM211



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥0.5



MATERIAL
PLASTIC



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000



CRI
≥ 80



WATTAGE (W)	12 W	18 W
LUMINOUS (LM)	800-1.000 LM	1.100-1.500 LM
DIMENSION (MM)	Φ 175x45 MM	Φ 225x45 MM





LED SPOTLIGHT

LUXMENN provides you premium quality LED SPOTLIGHT indoor fixtures with the ability to construct unique beams and interesting shades. Designed for easy and quick installation with less expense.

Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>80\text{lm/W}$ and $\text{CRI} >80$
- Build with high quality & certified LED Chip
- Easy installation with architecturally pleasing look
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Residential / Home
- Hotel and Meeting Room
- Office
- School, College and University
- Museum & Art Installation
- Hospital

LED SPOTLIGHT



LED HALOGEN BULB



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



BASE
E27 / MR16



MATERIAL
PLASTIC



BEAM ANGLE
60°



CRI
≥ 80



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-HLG	LUX-MR16
WATTAGE (W)	5 W	5 W
LUMINOUS (LM)	350-500 LM	350-500 LM
DIMENSION (MM)	Φ 49x65 MM	Φ 49x65 MM

COB SPOTLIGHT EXTRA BRIGHT



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



MATERIAL
PLASTIC



CRI
≥ 80



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-COB-3W	LUX-COB-5W	LUX-COB-7W
WATTAGE (W)	3 W	5 W	7 W
LUMINOUS (LM)	300 LM	500 LM	700 LM
DIMENSION (MM)	Φ 66x50 MM	Φ 88x53 MM	Φ 108x58 MM
CUT OUT (MM)	60 MM	75 MM	90 MM



SMD SPOTLIGHT



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥ 0.5



MATERIAL
ALUMINIUM



CRI
≥ 80



BEAM ANGLE
110°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-BRDL-3W	LUX-BRDL-5W	LUX-BRDL-7W
WATTAGE (W)	3 W	5 W	7 W
LUMINOUS (LM)	240 LM	400 LM	560 LM
DIMENSION (MM)	Φ 86x30 MM	Φ 108x4 MM	Φ 108x56 MM
CUT OUT (MM)	65 MM	90 MM	90 MM

Tersedia di :





LED TUBE LIGHT

LUXMENN provides you premium LED LINEAR LIGHT indoor fixtures to replace fluorescent lamps with large Watts.

Our tube lights are engineered to produce cost effective, high quality lighting. Designed for easy and quick installation with less expense.

Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>80\text{lm/W}$ and $\text{CRI} >80$
- Build with high quality & certified LED Chip
- Easy installation with architecturally pleasing look
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Residential / Home
- Hotel and Meeting Room
- Office
- School, College and University
- Museum and Art Installation
- Furniture
- Hospital

LED TUBE LIGHT



T8

 VOLTAGE
AC 100-260 V

 CCT (TEMP)
3000 & 6000 K

 PF
≥0.5

 MATERIAL
PLASTIC

 CRI
≥ 80

 BEAM ANGLE
220°/260°

 LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-T8-120CM
--------------	--------------

WATTAGE (W)	18 W
-------------	------

LUMINOUS (LM)	1.750 LM
---------------	----------

DIMENSION (MM)	Φ 35 x 1.200 MM
----------------	-----------------

T5 BATTEN MODEL

 VOLTAGE
AC 100-260 V

 CCT (TEMP)
3000 & 6000 K

 PF
≥0.5

 MATERIAL
PLASTIC

 CRI
≥ 80

 BEAM ANGLE
220°/260°

 LIFETIME (H)
≥ 20.000



PRODUCT CODE	LUX-T5-120CM	LUX-T5-90CM	LUX-T5-60CM
--------------	--------------	-------------	-------------

WATTAGE (W)	18 W	14 W	9 W
-------------	------	------	-----

LUMINOUS (LM)	1.440 LM	1.120 LM	720 LM
---------------	----------	----------	--------

DIMENSION (MM)	Φ 35 x 1.200 MM	Φ 35 x 900 MM	Φ 35 x 600 MM
----------------	-----------------	---------------	---------------



LED TRACK LIGHT

LUXMENN provides you premium quality indoor LED TRACK LIGHT to style your rooms and stores, also to exhibit displays. Devised to provide easily adjustable beams with high CRI (Color Rendering Index), equipped with energy-efficient technology and excellent lighting.

Designed for easy and quick installation with less expense.

Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>100\text{lm/W}$ and $\text{CRI}>80$
- Built with high quality & certified LED Chip
- Easy installation with architecturally pleasing hook
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR
- Rotateable Angle

Application

- Residential / Home
- Restaurant
- Cafetaria
- Hotel
- Apartment
- Boutique / Shop

LED TRACK LIGHT



TRACK LIGHT SERIES

EXTRA BRIGHT



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000, 4000, 6000 K



PF
≥0.5



MATERIAL
PLASTIC



CRI
≥ 80



BEAM ANGLE
60°



LIFETIME (H)
≥ 20.000

PRODUCT CODE	LUX-TRX-10W	LUX-TRX-24W	LUX-TRX-36W
WATTAGE (W)	10 W	24 W	36 W
LUMINOUS (LM)	1.000 LM	2.400 LM	3.600 LM
DIMENSION (MM)	Φ 89 x 112 MM	Φ 89 x 135 MM	Φ 89 x 152 MM



Tersedia di :





LED FLOOD LIGHT

LUXMENN provides you premium LED FLOOD LIGHT powered for polished lighting with high lumen. Suitable for indoor and outdoor environments of many scales.

Designed for easy and quick installation with less expense

Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>100\text{lm/W}$ and $\text{CRI}>80$
- Built with high quality & certified LED Chip
- Easy installation with architecturally pleasing hook
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Street
- Garden
- Court
- Parking Lot
- Factory
- Hospital

LED FLOOD LIGHT

FLOOD LIGHT SERIES EXTRA BRIGHT



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000, 6000 K



PF
≥ 0.5



CRI
≥ 80



BEAM ANGLE
120°



LIFETIME (H)
≥ 20.000



MATERIAL
ALUMINIUM+GLASS

PRODUCT CODE	LUX-FL10	LUX-FL30
WATTAGE (W)	10 W	30 W
LUMINOUS (LM)	1.000 LM	3.000 LM
DIMENSION (MM)	98 x 36 x 113 MM	155 x 45 x 185 MM

PRODUCT CODE	LUX-FL50	LUX-FL100
WATTAGE (W)	50 W	100 W
LUMINOUS (LM)	5.000 LM	10.000 LM
DIMENSION (MM)	195 x 58 x 230 MM	240 x 65 x 285 MM

Tersedia di :





LED STREET LIGHT

LUXMENN provides you premium LED STREET LIGHT to brighten larger spaces such as warehouses and factories, and open spaces such as parks. Manufactured to provide high performance lighting with high lumen, yet be highly efficient in energy.

Designed for easy and quick installation with less expense.

Product Features

- Long lifetime up to 20.000 hours
- Higher Lumen efficiency of $>100\text{lm/W}$ and $\text{CRI}>80$
- Built with high quality & certified LED Chip
- Easy installation with architecturally pleasing hook
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Street
- Garden
- Court
- Parking Lot
- Factory
- Road

LED STREET LIGHT



STREET LIGHT

MAXIMUM BRIGHTNESS



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000, 6000 K



PF
≥0.5



CRI
≥ 80



IP65



BEAM ANGLE
120°



LIFETIME (H)
≥ 20.000



MATERIAL
ALUMINIUM+GLASS

PRODUCT CODE	LUX-PJU-80W	LUX-PJU-100W
WATTAGE (W)	80 W	100 W
LUMINOUS (LM)	8.000 LM	10.000 LM
DIMENSION (MM)	155 x 45 x 550 MM	155 x 45 x 550 MM

HIGHBAY

MAXIMUM BRIGHTNESS



VOLTAGE
AC 85-265 V



CCT (TEMP)
3000 & 6000 K



PF
≥0.5



CRI
≥ 80



BEAM ANGLE
60°



LIFETIME (H)
≥ 20.000



MATERIAL
ALUMINIUM+GLASS

PRODUCT CODE	LUX-HIB
WATTAGE (W)	150 W
LUMINOUS (LM)	15.000 LM
DIMENSION (MM)	Φ 390 x 152 MM





LED STRIP LIGHT

LUXMENN provides you the premium quality for LED STRIP LIGHT fixtures with styling, efficiency and performance.

Design for quick installation and less expense.

Product Features

- Higher Lumen efficiency of $>70\text{lm/W}$ and $\text{CRI}>80$
- Built with high quality & certified LED Chip
- Easy installation with architecturally pleasing hook
- High Efficiency with energy saving up to 60-80 %
- No flickering, No UV and No IR

Application

- Residential / Home
- Hotel and Meeting Room
- Office
- School, College and University
- Museum and Art Installation
- Furniture
- Hospital

LED STRIP LIGHT



OUTDOOR LED STRIP



PRODUCT CODE
LUX-IP65-OUTDOOR



WATTAGE (W)
14 W



LUMINOUS (LM)
1.120 LM/METER



LENGTH (M)
1 ROLL = 5 METERS



VOLTAGE
DC 12 V



CCT (TEMP)
3000, 6000 K, BLUE



CRI
≥ 80



PF
≥ 0.5



LIFETIME (H)
≥ 20.000

INDOOR LED STRIP



PRODUCT CODE
LUX-IP33-INDOOR



WATTAGE (W)
14 W



LUMINOUS (LM)
1.120 LM/METER



LENGTH (M)
1 ROLL = 5 METERS



VOLTAGE
DC 12 V



CCT (TEMP)
3000, 6000 K, BLUE



CRI
≥ 80



PF
≥ 0.5



LIFETIME (H)
≥ 20.000



Tersedia di :



LED STRIP LIGHT



ROPE LED STRIP



PRODUCT CODE
LUX-SL2



WATTAGE (W)
6 W



LUMINOUS (LM)
480 LM/METER



LENGTH (M)
1 ROLL = 100 METERS



VOLTAGE
DC 12 V



CCT (TEMP)
3000, 6000 K, RGB (12W)
RED, BLUE, GREEN, AQUABLUE



CRI
≥ 80



PF
≥ 0.5



LIFETIME (H)
≥ 20.000

NEON FLEX



PRODUCT CODE
NFX-4W



WATTAGE (W)
4 W



LUMINOUS (LM)
320 LM/METER



LENGTH (M)
1 ROLL = 100 METERS



VOLTAGE
DC 12 V



CCT (TEMP)
3000, 6000 K, AQUABLUE
RED, BLUE, GREEN, PINK



CRI
≥ 80



PF
≥ 0.5



LIFETIME (H)
≥ 20.000



Tersedia di :

 **QHOME MART**



LED HOUSING & Others

LUXMENN provides you retrofit accessories for your lighting and styling purposes. Eases the application of our products for your many usage. Designed for easy and quick installation with less expense.

Product Features

- Built with high quality & certified LED Chip
- Easy installation with architecturally pleasing hook

Application

- Street
- Garden
- Court
- Parking Lot
- Factory
- Hospital

LED HOUSING & Others



HALOGEN INBOW HOUSING



PRODUCT CODE
LUX-HSMR16



DIMENSION (MM)
Φ 85 x 20 MM



MATERIAL
PLASTICS

BULB OUTBOW HOUSING



PRODUCT CODE
LUX-4107



WATTAGE (W)
MAX POWER 18W



MATERIAL
ALUMINIUM



DIMENSION (MM)
Φ 140 x 155 MM



VOLTAGE
AC 100-250 V



BASE
E27



TRACK LIGHT RAILING



PRODUCT CODE
LUX-TRX/RL/BW1
LUX-TRX/RL/BB1



WATTAGE (W)
MAX POWER 3X36W



MATERIAL
ALUMINIUM



LENGTH (MM)
1.000 MM



VOLTAGE
AC 100-250 V

T8 HOUSING



PRODUCT CODE
LUX-HST8-120CM



WATTAGE (W)
MAX POWER 18W



MATERIAL
ALUMINIUM+PLASTICS



LENGTH (MM)
1.225 MM



VOLTAGE
AC 100-250 V



BULB HOUSING



PRODUCT CODE
LUX-HSE27-3A1



WATTAGE (W)
MAX POWER 18W



MATERIAL
PLASTICS



DIMENSION (MM)
Φ 115 x 60 MM



VOLTAGE
AC 100-250 V



BASE
E27



* Ukuran produk ini bukan sebagai acuan untuk melubangi plafon

Tersedia di :

QHOME MART

LED HOUSING & Others



BULB OUTDOOR HOUSING



PRODUCT CODE
LUX-HSE27-03-KP



WATTAGE (W)
MAX POWER 18W



MATERIAL
PLASTICS



DIMENSION (MM)
Φ 160 x 110 MM



VOLTAGE
AC 100-250 V



BASE
E27

BULB INBOW HOUSING



VOLTAGE
AC 100-250 V



MATERIAL
ALUMUNUM + PLASTICS



BASE
E27



PRODUCT CODE	LUX-HSDL3.5	LUX-HSDL4
WATTAGE (W)	MAX POWER 18W	MAX POWER 18W
DIMENSION (MM)	Φ 90 x 3,5 IN	Φ 90 x 4 IN



BULB STREETLIGHT HOUSING



VOLTAGE
AC 100-250 V



MATERIAL
STEEL + PLASTICS



WATTAGE (W)
MAX POWER 18W



BASE
E27

PRODUCT CODE	LUX-HSPJ-01	LUX-HSPJ-02
SENSOR	NO	YES
DIMENSION (MM)	370 x 170 x 130 MM	370 x 170 x 130 MM



POWER SUPPLY LED STRIP



PRODUCT CODE
LUX-TRAVO 80/150



WATTAGE (W)
80 / 150 W



VOLTAGE
AC 100-240 V



MATERIAL
STEEL

* Ukuran produk ini bukan sebagai acuan untuk melubangi plafon

Tersedia di :



LED HOUSING & Others

DECORATIVE BULB HOUSING



VOLTAGE
AC 100-250 V



WATTAGE (W)
MAX POWER 18W



MATERIAL
ALUMINIUM



BASE
E27



PRODUCT CODE
LUX-HSE27-01
BLACK



PRODUCT CODE
LUX-HSE27-02
GOLD



PRODUCT CODE
LUX-HSE27-02
SILVER



PRODUCT CODE
LUX-HSE27-02
ROSE GOLD



SOCKET EXTENSION



PRODUCT CODE
LUX-EKU201DL



VOLTAGE
AC 100-250 V



WATTAGE (W)
MAX 2.500W



LENGTH (M)
3 METERS



2.1A FAST
CHARGING



SAKLAR
ON/OFF

Tersedia di :





“ Design is defined by
LIGHT and **SHADE**,
and appropriate lighting is
enormously important. ” - Albert Hadley -

Tersedia di:



QHOMEMART

JL.RAYA JANTI NO.96 YOGYAKARTA
(0274) 493 22 88 , 08112863773 (CHAT ONLY)

f qhomemart t qhomemart @ qhomemart y qhomemart
WWW.QHOMEMART.COM