









The first LED with Heat Resistance Technology



HIGH POWER TECHNOLOGY THAT LEAD THE INDUSTRY

HUBUNGI:

QHOMEMART

(0274) 493 22 88, 08112863773 (CHAT ONLY)



HIGH POWER TECHNOLOGY THAT LEAD THE INDUSTRY



SMART TEMPERATURE CONTROL TECHNOLOGY

Each product built with temperature controller, it will adjust the internal temperature of the lamp automatically according to the ambient temperature changes and to ensure the product reliability and lifespan.



DOB SWITCH TECHNOLOGY

Driver from the high temperature sealed heat chamber by moving to lower blister, drops the ambient temperature by more than 30 degree which greatly improve the life of the component. Effective in avoiding rapid light decay.



DPT COATING TECHNOLOGY

We use the DPT high radiation coating for our products, and the heat radiation increased from 0.3 rad to 0.9 rad, which can greatly improved the high power products heat dissipation ability.



SHORT RUNWAY THERMAL MANAGEMENT TECHNOLOGY

With the "short runway" heat dissipation design, it makes the high power products lighter, more environmental friendly and more comfortable to use


MODEL	RATED POWER	COLOR TEMPERATURE	LIFETIME	EFFICIENCY	WORKING VOLTAGE	PF	CRI	SIZE
MP-B55 / 5W	5W	3000K/ 4000K/ 6500K	30000Н	90lm/w	100-240V	0.5	>80	55*95 mm
MP-B55 / 5W-4P	5W	6500K	30000H	90lm/w	100-240V	0.5	>80	55*95 mm
MP-B58 / 7W	7W	3000K/ 4000K/ 6500K	30000H	90lm/w	100-240V	0.5	>80	58*103 mm
MP-B58 / 7W4P	7W	6500K	30000H	90lm/w	100-240V	0.5	>80	58*103 mm
MP-B60 / 9W	9W	3000K/ 4000K/ 6500K	30000H	90lm/w	100-240V	0.5	>80	60*113 mm
MP-B60 / 9W4P	9W	6500K	30000H	90lm/w	100-240V	0.5	>80	60*113 mm
MP-B60 / 12W	12W	3000K/ 4000K/ 6500K	30000H	90lm/w	100-240V	0.5	>80	60*118 mm
MP-B60 / 12W-4P	12W	6500K	30000H	90lm/w	100-240V	0.5	>80	60*118 mm
MP-B70 / 15W	15W	3000K/ 4000K/ 6500K	30000H	90lm/w	100-240V	0.5	>80	70*138 mm
MP-B75 / 18W	18W	3000K/ 4000K/ 6500K	30000H	90lm/w	100-240V	0.5	>80	75*146 mm
MP-B90 / 24W	24W	3000K/ 4000K/ 6500K	30000Н	90lm/w	100-240V	0.5	>80	90*184 mm

BUY 3 GET 1 FREE



30

IC DOB new place, low temperature





230 BEAM ANGLE

Designed with precision to aim wider beam angle coverage than the old and conventional lamp bulb.



08112863773 CHAT ONLY

HUBUNGI: DHOMEMART



SMART SMART CHOICE FOR YOUR COMFORT

LED Emergency Lighting

FEATURES



THE DARK



ABNORMAL CHARGE CURRENT PROTECTION

Abnormal charge current protection circuit provides extra safety.

2000mAh Lithium Battery

Premium lithium battery suitable charge for more than 200 times.

Universal Voltage

110-240V Universal Voltage









SPECIFICATION MP-EL68/9W MP-EL78/12W 110-240V 110-240V Rated Voltage 0.9 0.9 PF LUMENS 900 Im 1200 Im 180° 180° Beam Angle 20000 HOURS Life Time 20000 HOURS E27 E27 Cap Base CRI >80 >80 Color Temperature 6500K 6500K





- During a normal condition, it can operate as a general purpose lamp.
- It takes 10 hours to fully charge the battery, and it will operate up to 3.5 hours during the electricity shortage.
- During an Emergency condition,
 a 9W operate at 380 Lumens, and
 a 12W operate at 480 Lumens.











Suitable for shops along the street, and can completely replace UFO lamps and CFL.



08112863773

HUBUNGI: DHOMEMART

SILE




- The lighting area is expandable and the illuminating diameter is increased from 84mm to 350mm.
- The light has a bigger lighting area and a better brightness.

FOLDABLE Lamp

The three-leaf allows the lamp body to be folded.

 Compared with the traditional 35W UFO lamp, it saves packaging space, and a 40' High Cube Container can hold 52% more.

Product	MP-SWL84/35W
Carton size	36.8*36.8*26.8CM
Quantity	16PCS

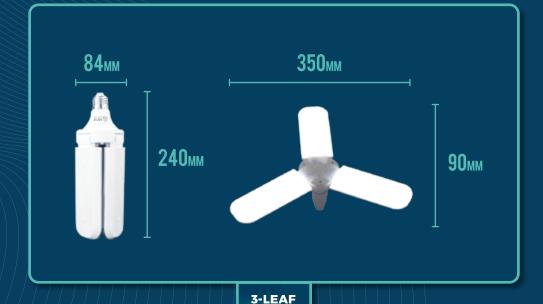

SPECIFICATION	MP-SWL84/35W	
Rated Voltage	110-240V	
PF	0.5	
LUMENS	3150 lm	
Beam Angle	120°	
Life Time	20000 HOURS	
Cap Base	E27	
CRI	>80	
Color Temperature	3000/4000/6500K	

08112863773

SMART

SMART

CHOICE

FOR YOUR COMFORT

HUBUNGI: DHOMEMART

FEATURES

FREE COMBINATION

SLOPE ANTI DUST DESIGN

STC SYSTEM

ALUMINIUM DIE CASTING


LONGER LIFETIME





T Bulb LED

T3S

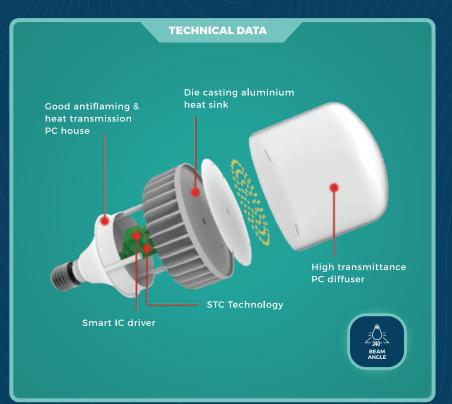

SLOPE ANTI-DUST DESIGN

Let Dust slip off!

Compare to the last generation, aluminium sheet cooling material groove with slope anti dust design. Effectively avoid the dust accumulated, increasing the heat dissipation and make sure the heat dissipation channel unhindered.



T- plus 2016s 40W Cooling surface area: 7.4 x10000mm T- plus 2016s 40W Cooling surface area: 7.4 x10000mm

74,000mm²

Enlarge Cooling Surface Area

The cooling surface area of the first generation T-PLUS is 57,000mm. The new generation shop bulbs with aluminium die casting-sheet design make sure the heat dissipation area increasing 30% and welding temperature is reduced 10degree.



INTERNAL STC SYSTEM

A Smart Lamp!

When the internal temperature is too high, the STC will automatically adjust the temperature by controlling the current.









SPECIFICATION	MP-K-T3S100/ 30W	MP-K-T3S118/ 40W	MP-K-T3S135/ 50W	
Rated Voltage	110-240V	110-240V	110-240V	
PF	0.5	0.5	0.5	
LUMENS	2700 lm	3600Im	4500 Im	
Beam Angle	240°	240°	240°	
Life Time	25000 HOURS	25000 HOURS	25000 HOURS	
Cap Base	E27	E27	E27	
CRI	>80	>80	>80	

08112863773 CHAT ONLY HUBUNGI: DHOMEMART









08112863773 CHAT ONLY HUBUNGI: DHOMEMART







Superior to the traditional factory lamp



PRODUCT	TRADITIONAL HANGING High-Bay	MPA SCREW High-Bay	
LUX (4M)	273 (LX)	268 (LX)	
WEIGHT	4.731 KG	0.701 KG	•
INSTALLATION	HOISTING	E40 SPIRAL	
PRICE	HIGH	LOW (LOW 50%)	⊘
WARRANTY	3	3	



MODEL	RATED POWER	INPUT VOLTAGE	PF	CRI	LUMEN	BEAM ANGLE	LIFETIME	CAP BASE
MPA SCREW HIGH-BAY	80W	110 - 240V	0.9	>80	7200lm	120°	25000 Hr	E40
(V4)	100W	110 - 240V	0.9	>80	9000lm	120°	25000 Hr	E40

Beyond the traditional technology



Lamp can free to match with the cover!!











LED Sticker T Bulb



08112863773 CHAT ONLY

HUBUNGI: DHOMEMART

SPECIFICATION



SPECIFICATION	MP-ST-T37/ 9 W	MP-ST-T44/ 12 W	MP-ST-T50/ 15W
Rated Voltage	110-240V	110-240V	110-240V
PF	0.5	0.5	0.5
LUMENS	810 Im	1080 Im	1350 Im
Beam Angle	120∘	120∘	120∘
Life Time	20000 HOURS	20000 HOURS	20000 HOURS
Cap Base	E27	E27	E27
CRI	>80	>80	>80
Color Temperature	3000/4000/6500K	3000/4000/6500K	3000/4000/6500K



COMPACT SIZE

More compact size than normal U-Type lamp







ULTRA WIDE-ANGLE LUMINESCENCE TECHNOLOGY

The light distribution is better bright, light range is more uniform, and it is more comfortable for functional lighting









3 IN 1 COLOR **SWITCH**



FEATURES

3 LIGHT COLOR SWITCH

MULTI PURPOSE

ENERGY SAVING

3000K 4000K 6500K

08112863773 CHAT ONLY

HUBUNGI: DHOMEMART



3 LIGHT COLOR SWITCH

Bulb's color temperature can be adjusted to suit your preferences and fit your moods in the room.

MULTI PURPOSE

Widely used in reading room, kitchen, bedroom and so on.







ENERGY SAVING

Energy saving super bright without flicker and no glare





SPECIFICATION	MP-3C60/9W
Rated Voltage	175-240V
PF	0.5
LUMENS	680-8101m
Beam Angle	230°
Life Time	20000 HOURS
Cap Base	E27
CRI	≥ 80
Color Temperature	3000K 4000K 6500K



08112863773 CHAT ONLY HUBUNGI: DHOMEMART







LED Little Apple




08112863773 CHAT ONLY

HUBUNGI: DHOMEMART

SPECTRUM DESIGN

Infinitely Close to Sunlight



WIDER & MORE EQUALLY LIGHTING RESULT



STRIPE DESIGN

Even and soft light radiation, also protect vision



HIGH QUALITY CHIP

Built-in with high quality chip, no fear high temperature



SPECIFICATION







SPECIFICATION	MP-LA70/ 15 W	MP-LA77/ 18W	MP-LA90/ 23W
Rated Voltage	100-240V	100-240V	100-240V
PF	0.5	0.5	0.5
LUMENS	1350 Im	1620 Im	2070 Im
Beam Angle	200∘	200∘	200∘
Life Time	25000 HOURS	25000 HOURS	25000 HOURS
Cap Base	E27	E27	E27
CRI	>80	>80	>80
Color Temperature	3000/4000/6500K	3000/4000/6500K	3000/4000/6500K

