


KAYU ASRI


THE ONE FOR LIVING OUTDOOR



KATALOG PRODUK PRICE LIST PROJECT REFERENCE

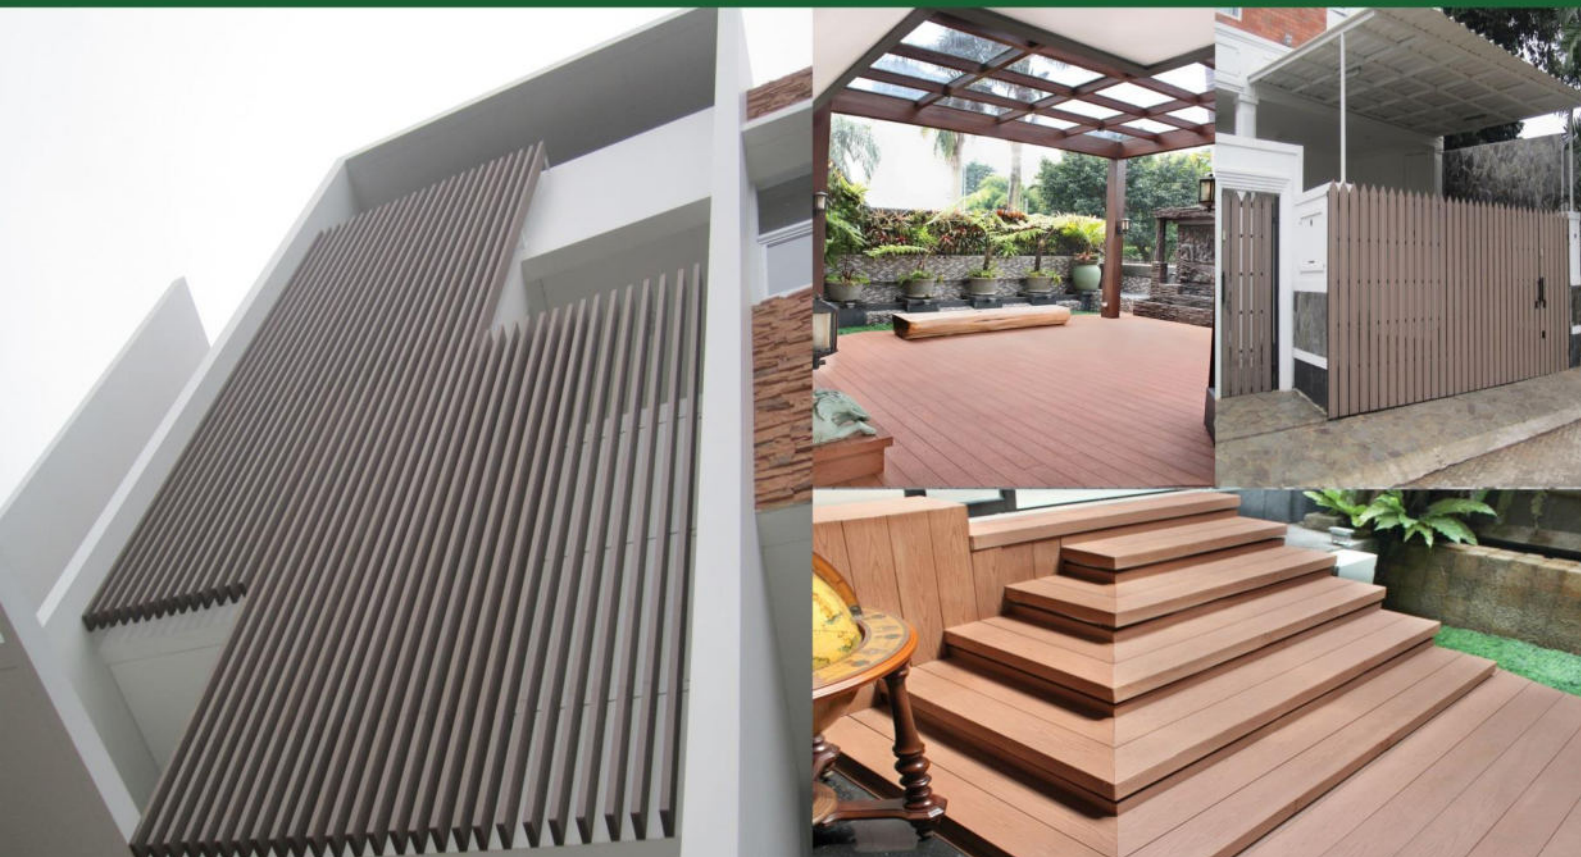

WOOD PLASTIC COMPOSITE (WPC)

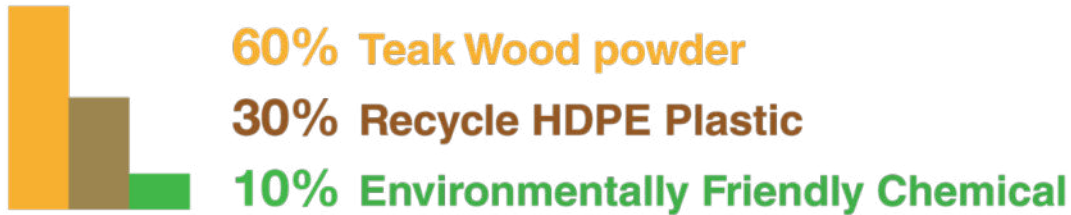

With Serves to keep the product :

- Termite Resistant
- Fungal Resistant
- UV Resistant
- Anti Oxidant
- Low & simple maintenance with no further finishing
- Easy to install

Let's Protect Our Earth and the Forest from now

By using WPC (Wood Plastic Composite) we contribute to protecting our Earth and Forest. EARTH and FOREST will keep us from Natural damage.

1 Ton WPC could protect forests 700m², and could save 2.5 cubic timber and also protect our planet from plastic trash that can not biodegrade for hundreds of years.

WPC is made from PE & PP recycled plastic materials, such like used water bottles that can be recycled and environmental friendly. WPC product do not require painting, no PVC material and free from toxin.

MEMBER OF:



PRODUCT FEATURE



Termite Resistant




Thanks to its unique composition, Wood Plastic Composite (WPC) are resistant against environmental effects (rain, sunshine, frost and snow), wood destroying fungus, rot and insects. They are also resistant against mechanical damage, similar to hard wood.

WPC require very little maintenance, just install them and enjoy. They do not require painting, staining or any kind of surface treatment. If necessary, they can simply be washed with water. This will save you a lot of time and money.

You can trust WPC products, which is why we offer up to a **10-year** warranty period. Laboratory tests have estimated the very long lifetime of WPC products.


WPC come with original patterns and a very large assortment of permanent colours. They are indistinguishable from real wood. Our manufacturing is environmentally friendly and the slats are 100% recyclable.

WPC do not splinter, unlike those made of wood. The material is completely safe and does not contain PVC or any toxic materials, so it poses no health risk.

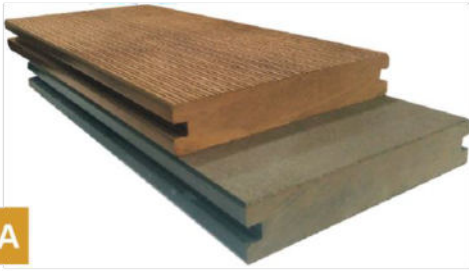

KA145S25 A

2900 x 145 x 25 mm
13 KG

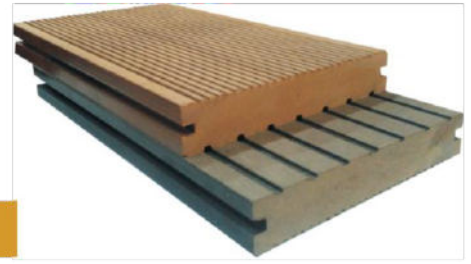

KA140S25

2900 x 140 x 25 mm
12 KG



KA145S25 B

2900 x 145 x 25 mm
13.5 KG



KA140S20

2900 x 140 x 20 mm
10.3 KG



KA150S25 A

2900 x 150 x 25 mm
13.3 KG



KA150K25 A

2900 x 150 x 25 mm
8.0 KG



KA150S25 C

2900 x 150 x 25 mm
13.2 KG



KA150K25 B

2900 x 150 x 25 mm
8.0 KG

DECKING

WOOD PLASTIC COMPOSITE



KA150K25 C

2900 x 150 x 25 mm
8.1 KG



KA150K25 D

2900 x 150 x 25 mm
8.5 KG



KA147K30

2900 x 147 x 30 mm
9.2 KG



Wood Grain Grey

2900 x 140 x 25 mm
14.4 KG



Thailand Teak

2900 x 140 x 25 mm
12.6 KG



Rhine Oak White

2900 x 140 x 25 mm
14 KG

SIDE COVER

WOOD PLASTIC COMPOSITE



KA40L45

2900 x 40 x 45 mm
1.3 KG



KA72S12

2900 x 72 x 12mm
3.1 KG

JOIST

WOOD PLASTIC COMPOSITE



KA40S25

2900 x 40 x 25 mm
2.8 KG



KA50S25

2900 x 50 x 25 mm
4.2 KG



KA50K25

2900 x 50 x 25 mm
3 KG

ACCESSORIES

WOOD PLASTIC COMPOSITE



Starting Clip



**Screw 3 cm
(Stainless Steel)**



Stainless Clip



Fisher




Plastic Clip 1



**Screw 6 cm
(Stainless Steel)**

Tersedia di :



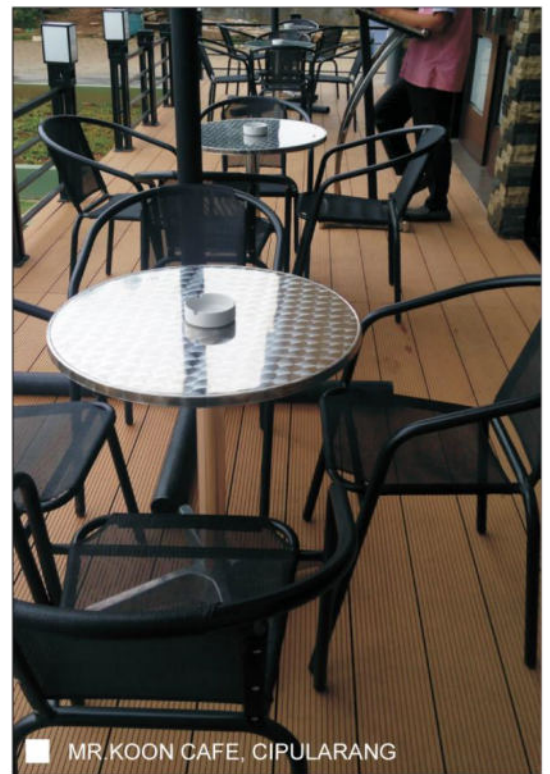




■ SWISS BELL INN HOTEL, JAKARTA



■ HOTEL PULLMAN, SUDIRMAN

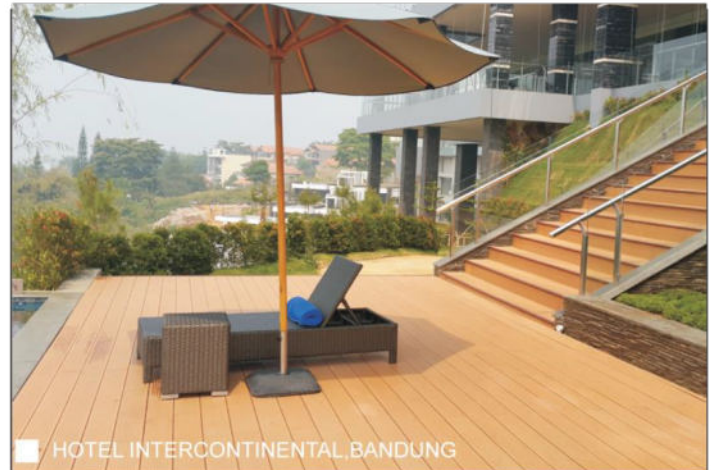

■ HOTEL INTERCONTINENTAL, BANDUNG



■ NOVOTEL, BANDUNG

Installation Decking

Type : **KA150S25**
 Dimension : 150 x 25 x 2900 mm
 Weight : 13.3 KG










Installation Decking

Type : KA150K25
 Dimension : 150 x 25 x 2900 mm
 Weight : 8.6 KG








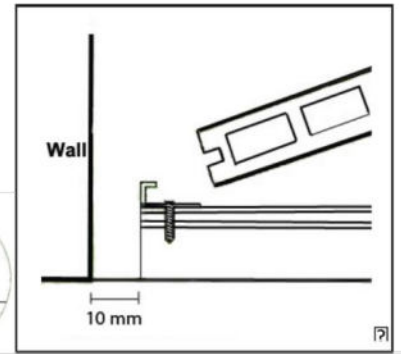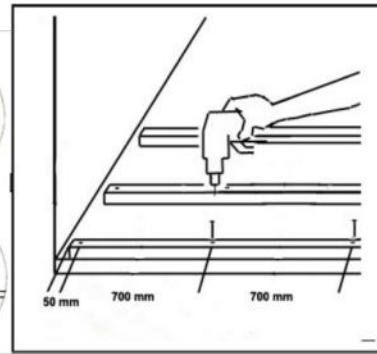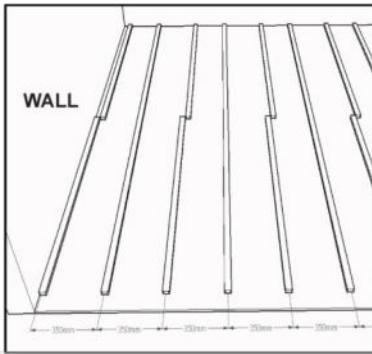

1. Make sure the installation media of WPC decking is ready with the sloping of the floor minimum of 1% for water flow. Place the installation of joist connection must zigzag with space between joist to joist 350mm. Space between the joist to the wall is 10mm.

2. Drill the surface of the joist through the floor from the tip of the joist with space of 50mm. Next set the fisher on the floor and then set the screw on the joist through the floor that has been installed by fisher. Do the installing of the screw and fisher consecutively with space between the screw of 350mm.






3. Set the starting clip on the beginning of the decking installation, place on the tip of the joist and fasten using the screw.

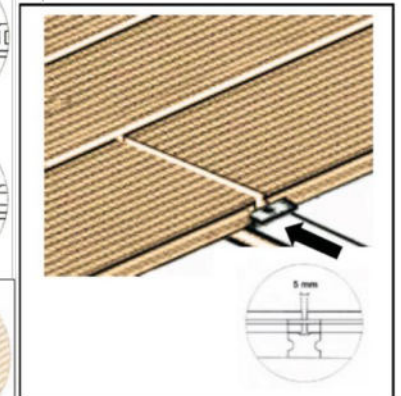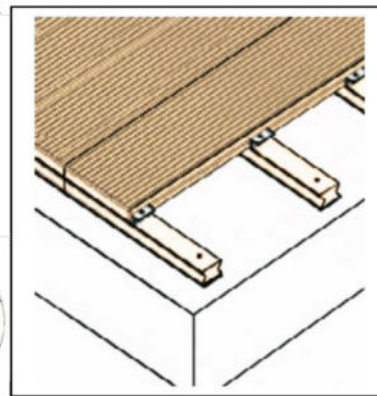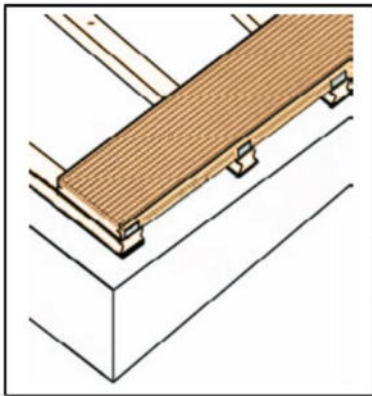

4. Place the decking on the joist and input the decking on the starting clip and make sure it fits and tight when installing.

5. Next set the clip on the first decking and the next decking (one plastic of stainless clip are installed on every one rod of joist). Then push the decking docked on the plastic clip so the plastic clip stays between and the nat distant between the decking or the connection is 5mm.

6. On the decking that has been installed zigzag, the connecting of decking placed on the joist and fasten it using the plastic/stainless clip with space of 5mm.

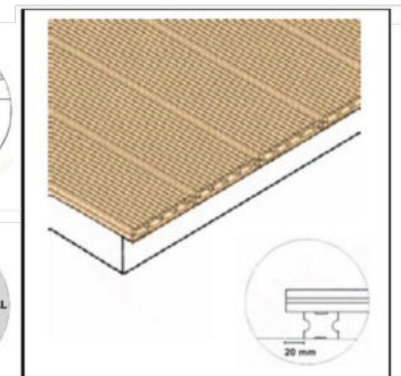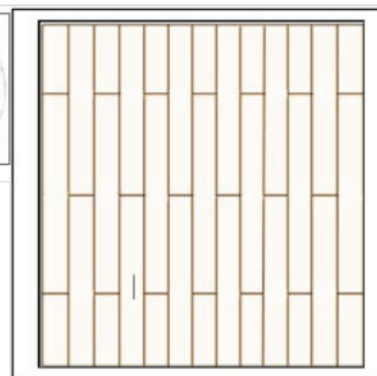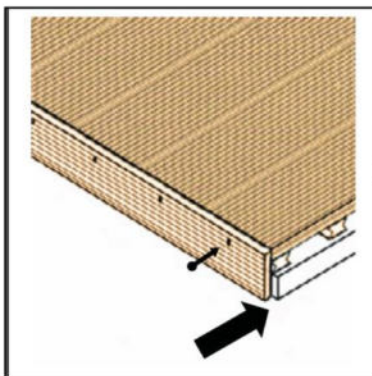

7. After all of the decking have been installed, to well-arranged the side of the installed decking, you can use the side cover on the outer side decking. Place the side cover on the tip side of the installed decking and fasten using the screw. And set the first screw 5mm from the tip of side cover.

8. If the deckings are installed zigzag, make sure the space between the nat is 5mm.

9. The maximum excess of the outer edge of the decking is 20mm.

WALL & FENCING

WOOD PLASTIC COMPOSITE



KA150K15 A

2900 x 150 x 15 mm
5 KG



KA150K15 B

2900 x 150 x 15 mm
5.4 KG



KA150K15 C

2900 x 150 x 15 mm
5.2 KG



KA145K13

2900 x 150 x 25 mm
4.0 KG



KA147Q21 A

2900 x 147 x 21 mm
4.7 KG



KA147Q21 B

2900 x 147 x 21 mm
4.9 KG



KA147Q21 C

2900 x 147 x 21mm
4.7 KG



KA150S10

2900 x 150x 10 mm
5.6 KG



KA100S10

2900 x 100 x 10 mm
3.9 KG

Tersedia di :





Installation Ceiling

Type : KA147Q21 B
 Dimension : 147 x 21 x 2900 mm
 Weight : 4.9 KG



Installation Facade

Type : KA150K15 A
 Dimension : 150 x 15 x 2900 mm
 Weight : 5.0 KG



Installation Fence

Type : KA150S10
 Dimension : 150 x 10 x 2900 mm
 Weight : 5.6 KG



Installation Fence

Type : KA145K13
 Dimension : 145 x 13 x 2900 mm
 Weight : 4.0 KG



PARTITION

WOOD PLASTIC COMPOSITE



KA110K35

2900 x 110 x 35 mm
7.9 KG



KA150K50

2900 x 150 x 50 mm
10.4 KG



KA90S40

2900 x 90 x 40 mm
12.7 KG



KA50K50

2900 x 50 x 50 mm
3.9 KG



KA100K50 A

2900 x 100 x 50 mm
7.5 KG



KA100K50 B

2900 x 100 x 50 mm
6.7 KG



KA80K40

2900 x 80 x 40 mm
4.7 KG

WINDOW AND DOOR FRAME

WOOD PLASTIC COMPOSITE



KU110K50

110 x 50 x 2500 mm
6.1 KG



KU110K65

110 x 65 x 2500 mm
6.9 KG



KA100K43

100 x 43 x 2500 mm
5.7 KG

Tersedia di :





Installation Partition

Type : KA110K35
 Dimension : 110 x 35 x 2900 mm
 Weight : 7.9 KG



Installation Partition

Type : KA80K40
 Dimension : 80 x 40 x 2900 mm
 Weight : 4.7 KG



Installation Partition

Type : KA80K40
 Dimension : 80 x 40 x 2900 mm
 Weight : 4.7 KG



Installation Partition

Type : KA50K50
 Dimension : 50 x 50 x 2900 mm
 Weight : 3.9 KG



DECKING TILE

WOOD PLASTIC COMPOSITE



DIY 3B DECKING TILE

300 x 300 x 25 mm
1.3 KG




DIY 3C DECKING TILE

300 x 300 x 25 mm
1.3 KG



DIY 1 DECKING TILE

300 x 300 x 25 mm
1.3 KG




DIY 2 DECKING TILE

300 x 300 x 25 mm
1.3 KG



KEMANG VILLAGE

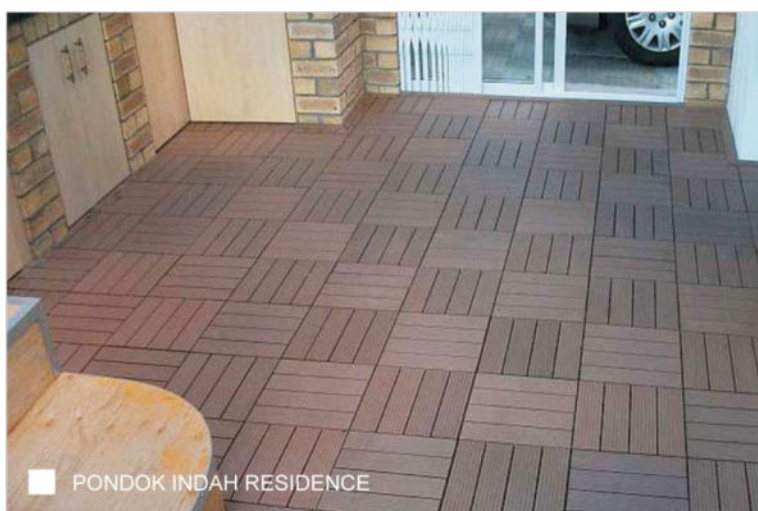

PONDOK INDAH RESIDENCE




HOTEL TRIVIUM



REP. of TIONGKOK EMBASSY

Installation Decking

Type : Decking Tile DIY
Dimension : 300 x 300 x 25 mm
Weight : 1.3 KG




Tersedia di :




COLOUR TYPE

WOOD PLASTIC COMPOSITE

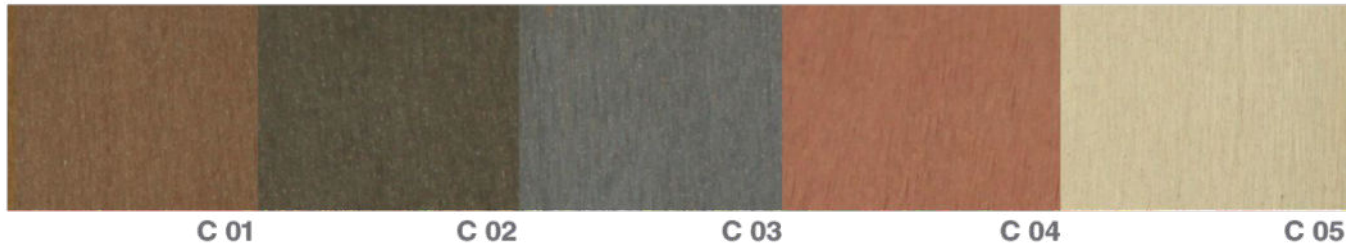

WOOD PLASTIC COMPOSITE (WPC) COLOUR CHANGES

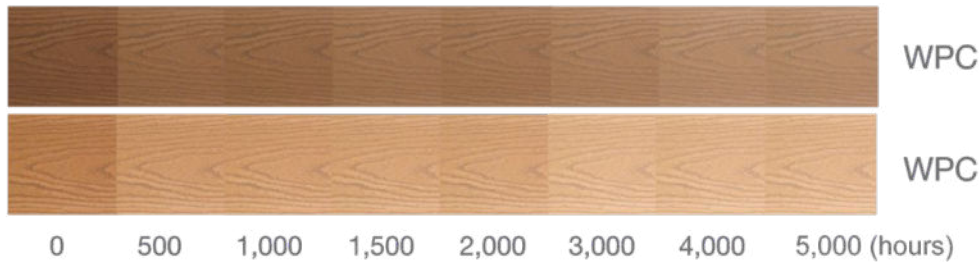

Outcome after solar shine tests (Specimen colour : Wood/Coffee). Approx. 500 hours equals 1 year, subject to geographical variation.

MAINTENANCE

WOOD PLASTIC COMPOSITE



For any cigarette stain,
ink stain



Clean with Sandpaper



Finish



For routine maintenance,
use sponge with detergent
and water



Clean stain with sponge
and water



Finish

Tersedia di :



WHY WPC KAYU ASRI ?

- > JAPAN Technology
- > 10 Years Limited Guarantee
- > Slip Resistant (Ideal for pools)
- > Termite Resistant
- > Fungal Resistant
- > 100% Asbestos Free
- > UV Resistant
- > Easy Installation
- > Low Maintenance
- > Anti Oxidant
- > Fire Resistant
- > Weather Resistant

Certified by :



The mark of
responsible forestry
FSC® C129637



Tersedia di:



JL.RAYA JANTI NO.96 YOGYAKARTA
(0274) 493 22 88 , 08112863773 (CHAT ONLY)

f qhomemart t qhomemart @ qhomemart y qhomemart
WWW.QHOMEMART.COM