

TACO

PERFORM 300

Tersedia di:



JL. RAYA JANTI NO.96 YOGYAKARTA
(0274) 493 22 88 , 08112863773 (CHAT ONLY)
f qhomemart t qhomemart @ qhomemart qhomemart
WWW.QHOMEMART.COM

WOOD SERIES

Wear Layer **0.2mm**
Thickness **3.0mm**

Size **152.4mm x 914.4mm**
24 pieces/box **3.34sqm**



TV 3031 Charleston Teak **NEW**



TV 3013 White Oak



TV 3003 Washed Oak



TV 3015 Vicenza Elm



TV 3030 Butternut Teak **NEW**



TV 3005 Vintage Oak

WOOD SERIES

Wear Layer **0.2mm**
Thickness **3.0mm**

Size **152.4mm x 914.4mm**
24 pieces/box **3.34sqm**



TV 3029 Summer Teak **NEW**



TV 3008 Sand Malmo



TV 3010 Warm Cherry



TV 3006 Real Cherry



TV 3014 Natural Beech



TV 3004 Parma Oak

WOOD SERIES

Wear Layer 0.2mm
Thickness 3.0mm

Size 152.4mm x 914.4mm
24 pieces/box 3.34sqm



TV 3017 Original Cherry



TV 3007 Merbau Wood



TV 3001 Rustic Oak



STONE SERIES

Wear Layer **0.2mm**
Thickness **3.0mm**

Size **304.8mm x 609.6mm**
18 pieces/box **3.34sqm**



TV 3032 Natural Sand **NEW**



TV 3033 Gray Sand **NEW**



TV 3024 Grey Slate



TV 3026 Stone



TV 3025 Dark Grey Slate

“

We shape our homes and then
our homes shape us.

Winston Churchill

”


“

Every great design begins with
an even better story.


Lorinda Mamo

”

Size **457.2mm x 457.2mm**
16 pieces/box **3.34sqm**

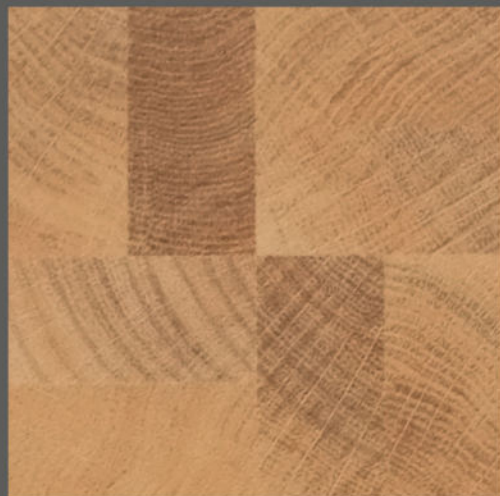

TV 3027 Mozaic - Natural

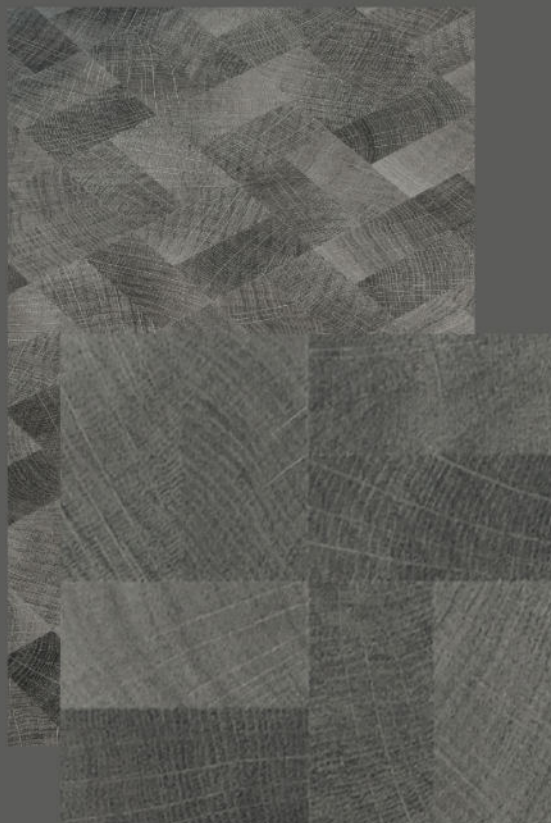

TV 3028 Mozaic - Grey

TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	PASS
Resistance to chemicals	EN423:93 Class 0	✓
Bearing castor	EN425:94	✓
Dimension squareness and straightness	EN427:94	✓
Thickness overall	EN429:93	✓
Thickness wear layer	EN429:93	✓
Residual indentation after static load	EN433:94	✓
Dimensional stability and curling after exposure to heat	EN434:94	✓
Shrinkage rate	≤0.25%	✓
Curling	≤2mm	✓
Flexibility	EN435:94(A) Bend around 20mm mandrel shows no sign of cracking	✓
Abrasion resistance	EN660-1/-2	✓
Color fastness to light	EN 20 ISO 105-B02 6 or above	✓
Toxic element test	EN 71-3	✓
Specific gravity	ASTM D792:91	✓
Coefficients of friction	ASTM D1894:01	✓
Sound reduction	DIN52210:4db	✓
Flammability	EN 71-2	✓
Smoke density	DIN4102/ASTM D2843-99:Class B1	✓
Electrical resistance	EN1081 Method C	✓
Fungus test	ASTM G21:96 Grade 1	✓
IMO resolution	MSC61(67) Part 2 MSC61(67) Part 5	✓ ✓

PRODUCED UNDER HIGH QUALITY SUPERVISION WITH ISO 9001 ISO 14001 OHSAS 18001 CE STDS.



100%
WATERPROOF



EASY TO CLEAN &
MAINTAIN



TERMITE
PROOF



SIMPLE & QUICK
TO INSTALL

Wood Series



Stone Series

